

28 015 979




- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system
- spray head Ø 100mm
- 1/2" connection
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.


Fits: IMO, LULU, MADISON, MEM, TARA,
CL.1, LISSÉ, VAIA, META, CYO

28 015 979

mm [inches]



Flow rate chart

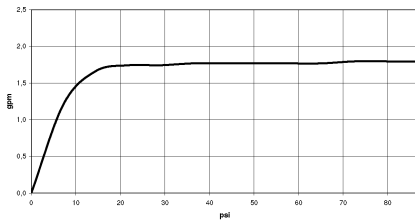

Codes & Standards

ASME A112.18.1

cUPC

DIN 4109

EN 1112

ISO 3822

Ü-Zeichen



Hand shower FlowReduce - Chrome

IMO

28 015 979

Certificates


DVGW_DW-
6517DN0

LGA_29

IAPMO_4976

28 015 979

Product version from 4/1/2024

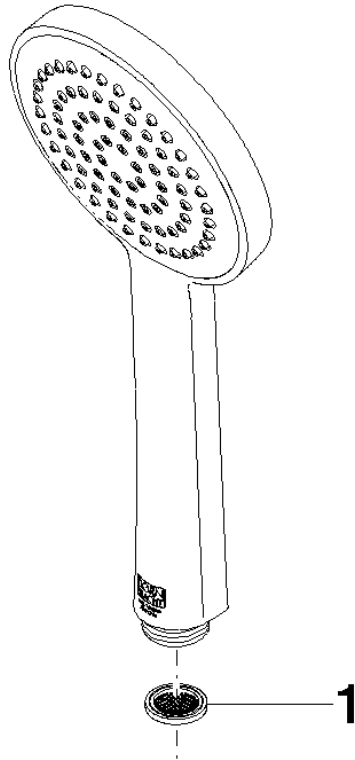



Hand shower FlowReduce - Chrome

IMO

28 015 979

Spare parts list

Product version from 4/1/2024

No.	Item Number	Name	Quantity used	Delivery time
	09 23 01 039 90	sieve	1	2