

**Rain shower for surface-mounted ceiling installation with light 300 mm -  
Brushed Champagne (22kt Gold)**

TARA

28 032 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6.8 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system
- central LED Spot 3000 K
- Provided by customer: Light switch
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Not suitable for use in a steam room.

**Three-way diverter trim is sold separately**

Three-way diverter trim is sold separately

|  |                               |                    |
|--|-------------------------------|--------------------|
|  | Brushed Champagne (22kt Gold) | 28 032 970-46 0050 |
|  | Chrome                        | 28 032 970-00 0050 |
|  | Brushed Platinum              | 28 032 970-06 0050 |
|  | Platinum                      | 28 032 970-08 0050 |
|  | Dark Chrome                   | 28 032 970-19 0050 |
|  | Light Gold                    | 28 032 970-26 0050 |
|  | Brushed Light Gold            | 28 032 970-27 0050 |
|  | Brushed Durabrass (23kt Gold) | 28 032 970-28 0050 |
|  | Matte Black                   | 28 032 970-33 0050 |
|  | Brushed Bronze                | 28 032 970-42 0050 |
|  | Champagne (22kt Gold)         | 28 032 970-47 0050 |
|  | Brushed Chrome                | 28 032 970-93 0050 |
|  | Brushed Dark Platinum         | 28 032 970-99 0050 |

**Required miscellaneous**



**Concealed ceiling installation box for surface-mounted ceiling installation with light -**

35 042 970 90

- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" connections
- Input 100-240V AC 50-60Hz
- concealed rough parts
- Output 350 mA SELV / Class II
- Provided by customer: Light switch

**Required miscellaneous**



**Concealed ceiling installation box for surface-mounted ceiling installation with light -**


35 042 970 90

- concealed rough parts
- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" connections
- Input 100-240V AC 50-60Hz
- Output 350 mA SELV / Class II
- Provided by customer: Light switch

**Rain shower for surface-mounted ceiling installation with light 300 mm -  
Brushed Champagne (22kt Gold)**

TARA


28 032 970  
mm [inches]

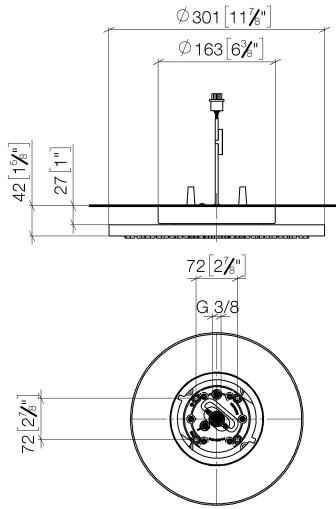

**Flow rate chart**



28 032 970

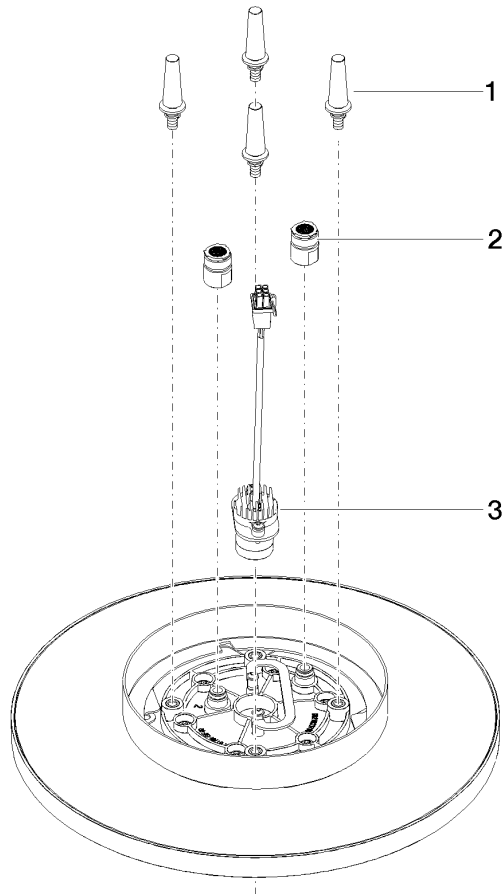

### Spare parts list

| No. | Item Number        | Name                   | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1   | 90 17 20 263 00 90 | fixing set             | 1             | 2             |
| 2   | 90 24 03 309 02 90 | connection             | 2             | 2             |
| 3   | 90 10 01 225 00 90 | electronic accessories | 1             | 2             |