

Rain shower for surface-mounted ceiling installation with light 300 x 240 mm -  
Champagne (22kt Gold)

IMO

28 042 980



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6.8 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system
- central LED Spot 3000 K
- Provided by customer: Light switch
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Not suitable for use in a steam room.

Fits: IMO, LULU, MEM, CL.1, CYO

**Three-way diverter trim is sold separately includes light bulbs with a Class F energy efficiency**

Three-way diverter trim is sold separately includes light bulbs with a Class F energy efficiency

	Champagne (22kt Gold)	28 042 980-47 0050
	Chrome	28 042 980-00 0050
	Brushed Platinum	28 042 980-06 0050
	Platinum	28 042 980-08 0050
	Dark Chrome	28 042 980-19 0050
	Brushed Durabronze (23kt Gold)	28 042 980-28 0050
	Matte Black	28 042 980-33 0050
	Brushed Champagne (22kt Gold)	28 042 980-46 0050
	Brushed Chrome	28 042 980-93 0050
	Brushed Dark Platinum	28 042 980-99 0050

Required miscellaneous




**Concealed ceiling installation box for surface-mounted ceiling installation with light -** 35 042 970 90

- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" connections
- Input 100-240V AC 50-60Hz
- concealed rough parts
- Output 350 mA SELV / Class II
- Provided by customer: Light switch


Rain shower for surface-mounted ceiling installation with light 300 x 240 mm -  
Champagne (22kt Gold)

IMO

28 042 980  
mm [inches]

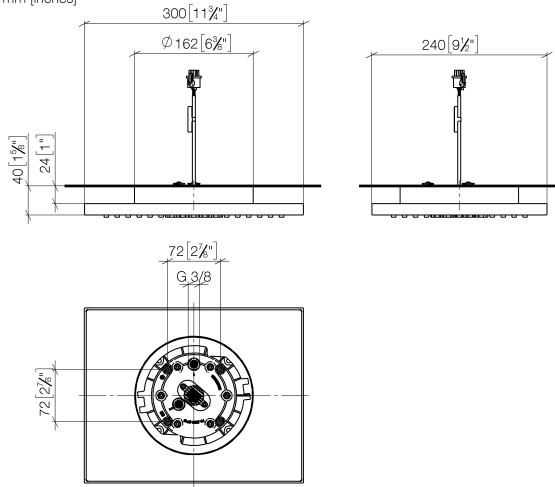

Flow rate chart

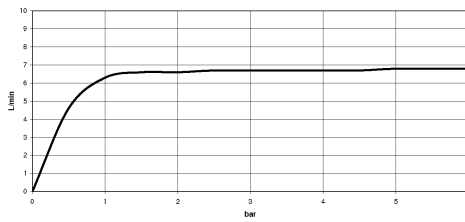

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2