

Rain shower for recessed ceiling installation with light 300 x 240 mm - Dark Chrome

IMO

28 044 980



Fits: IMO, LULU, MEM, CL.1, CYO

- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6.8 l/min (at 3 bar)
- min. recess depth 137 mm
- with anti-scale system
- central RGBW LED spot
- RGBW LED ambient lighting
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
 • For simultaneous control of the jet types, we
- recommend the xTool thermostat module
- Not suitable for use in a steam room.

Three-way diverter trim is sold separately includes light bulbs with a Class G energy efficiency

Three-way diverter trim is sold separately

includes light bulbs with a Class G energy efficiency



Required miscellaneous




Concealed ceiling installation box 35 044 970 90 for recessed ceiling installation with light -


- •flush-mounted installation box 360x 300 mm RAL 9003 signal white
- •recess depth 137mm
- •Supply pipe 7 m
 •concealed rough parts
- ●Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class II
- •ZigBee Light Link RGBW controller
- •Provided by customer: Zigbee gateway



Rain shower for recessed ceiling installation with light 300 x 240 mm - Dark Chrome



Flow rate chart








Rain shower for recessed ceiling installation with light 300 x 240 mm - Dark Chrome

28 044 980

Product version from 7/1/2022

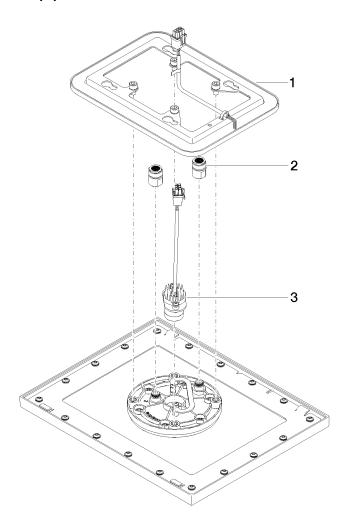

7/27/2024



Rain shower for recessed ceiling installation with light 300 x 240 mm - Dark Chrome

IMO

28 044 980

Spare parts list

Product version from 7/1/2022

No.	Item Number	Name	Quantity used	Delivery time
	90 10 01 224 00 90	electronic accessories	4	2