







28 565 977



- rain shower Ø 200 mm
- PURE RAIN, max. flow rate 14 l/min (at 3 bar)
- distance between ceiling and lower edge of the shower 185mm
- rosette Ø 55 mm
- 1/2" connection
- with anti-scale system
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Platinum	28 565 977-08 0050
	Chrome	28 565 977-00 0050
	Brushed Platinum	28 565 977-06 0050
	Durabrace (23kt Gold)	28 565 977-09 0050
	Brushed Durabrace (23kt Gold)	28 565 977-28 0050
	Brushed Dark Platinum	28 565 977-99 0050


Recommended miscellaneous




- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
 - min. recess depth 90 mm

28 565 977


mm [inches]

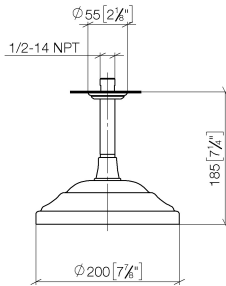

Flow rate chart

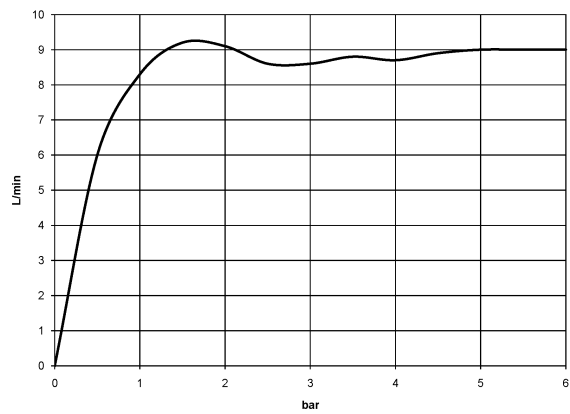

28 565 977

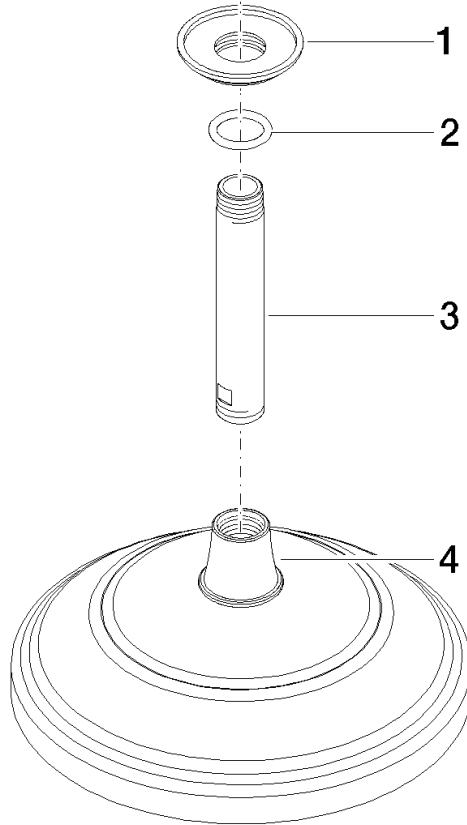

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 27 35 003-08	rosette	1	40
2	90 14 10 026 00 90	seal	2	2
3	09 11 03 018-08	connection	1	40
4	90 12 05 038 20-08	shower	1	40