

Rain shower with ceiling fixing 220 mm - Brushed Durabronze (23kt Gold)










IMO

28 669 970



- rain shower Ø 220 mm
- PURE RAIN, max. flow rate 14 l/min (at 3 bar)
- rosette Ø 60 mm optional
- 1/2" connection
- with anti-scale system
- quick clearing
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Fits: IMO, TARA, LISSÉ, VAIA, META, CYO

	Brushed Durabronze (23kt Gold)	28 669 970-28 0050
	Chrome	28 669 970-00 0050
	Brushed Platinum	28 669 970-06 0050
	Platinum	28 669 970-08 0050
	Dark Chrome	28 669 970-19 0050
	Light Gold	28 669 970-26 0050
	Light Gold	28 669 970-26
	Brushed Light Gold	28 669 970-27 0050
	Brushed Light Gold	28 669 970-27
	Matte Black	28 669 970-33 0050
	Brushed Bronze	28 669 970-42 0050
	Brushed Champagne (22kt Gold)	28 669 970-46 0050
	Champagne (22kt Gold)	28 669 970-47 0050
	Brushed Chrome	28 669 970-93 0050
	Brushed Dark Platinum	28 669 970-99 0050


Recommended miscellaneous



- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
 - min. recess depth 90 mm

28 669 970


mm [inches]

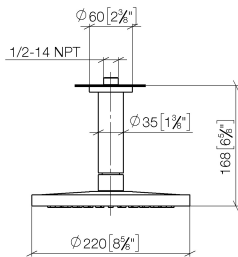

Flow rate chart



28 669 970

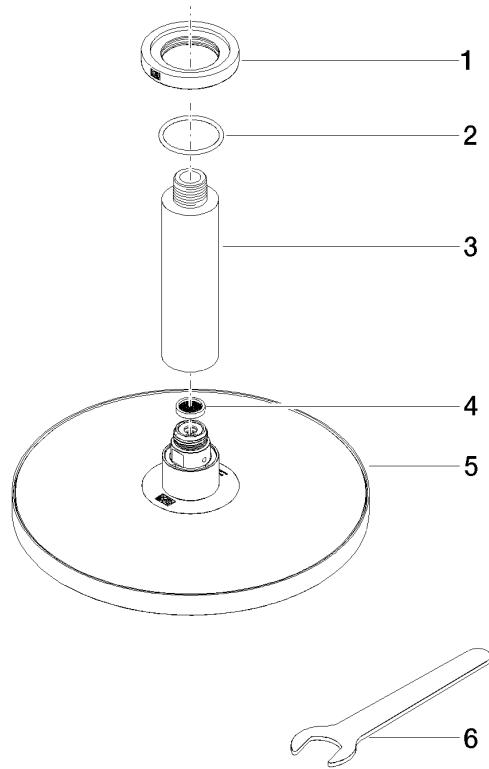

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 27 22 040-28	rosette	1	20
2	09 14 10 141 90	seal	1	2
3	09 11 03 080-28	connection	1	20
4	09 23 01 075 90	insert	1	2
5	90 12 05 092 20-28	shower	1	20
6	90 30 09 069 00 90	key	1	2