

## Concealed thermostat with three function volume control - Brushed Light Gold SERIES SPECIFIC

36 427 670 Product version from 6/30/2022



- rotary diverter with volume control and shut-off function
- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

	Brushed Light Gold	36 427 670-27
	Chrome	36 427 670-00
	Brushed Platinum	36 427 670-06
	Platinum	36 427 670-08
	Dark Chrome	36 427 670-19
	Brushed Durabronze (23kt Gold)	36 427 670-28
	Matte Black	36 427 670-33
	Brushed Champagne (22kt Gold)	36 427 670-46
	Champagne (22kt Gold)	36 427 670-47
	Brushed Chrome	36 427 670-93
	Brushed Dark Platinum	36 427 670-99

### Required miscellaneous



**Concealed thermostat -** 35 427 970 90  
 • min. recess depth 80 mm  
 • max. recess depth 136 mm

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

### Required miscellaneous



**Concealed thermostat with built-in isolators -** 35 428 970 90  
 • min. recess depth 80 mm  
 • max. recess depth 136 mm

### Required miscellaneous




**xGRID Installation track 555 mm -** 12 360 970 90


**Concealed thermostat with three function volume control - Brushed Light Gold      SERIES SPECIFIC**

36 427 670    Product version from 6/30/2022

mm [inches]

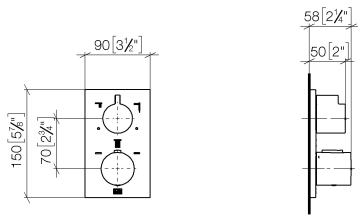

**Flow rate chart**

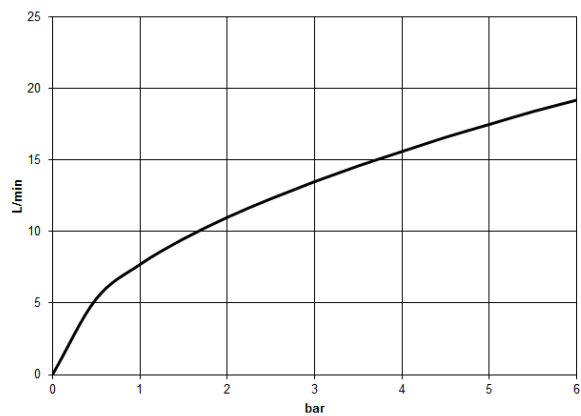

**Codes & Standards**

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



Concealed thermostat with three function volume control - Brushed Light Gold      SERIES SPECIFIC

---

36 427 670    Product version from 6/30/2022

Certificates and sustainability

---

LGA_29	DVGW_DW-6512DN0	WRAS_1906
--------	-----------------	-----------

## Concealed thermostat with three function volume control - Brushed Light Gold SERIES SPECIFIC

36 427 670 Product version from 6/30/2022

