

xTOOL Concealed thermostat without volume control 3/4" - Champagne (22kt Gold)












IMO

36 503 985



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge

Fits: IMO, MEM, CL.1, CYO

	Champagne (22kt Gold)	36 503 985-47
	Chrome	36 503 985-00
	Brushed Platinum	36 503 985-06
	Platinum	36 503 985-08
	Dark Chrome	36 503 985-19
	Brushed Light Gold	36 503 985-27
	Brushed Durabronze (23kt Gold)	36 503 985-28
	Matte Black	36 503 985-33
	Brushed Champagne (22kt Gold)	36 503 985-46
	Brushed Chrome	36 503 985-93
	Brushed Dark Platinum	36 503 985-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control - 35 503 970 90
 • max. recess depth 160 mm
 • min. recess depth 95 mm

Recommended miscellaneous




xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm - 12 360 970 90

36 503 985
mm [inches]

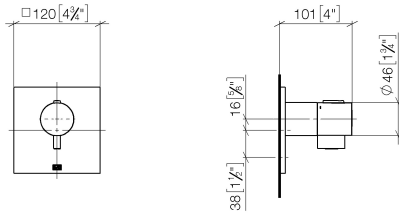

Flow rate chart

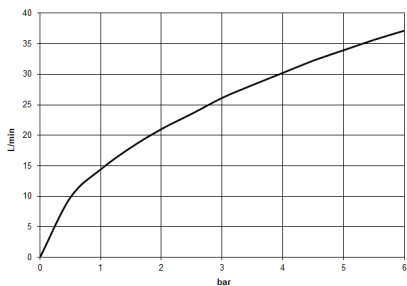

3551197090 + 36503xxx-FF + 366x7xxx-FF

Certificates

WRAS_2011026.

DVGW_DW-
6512DN0706.

LGA_29930.

36 503 985

