

ST 010 107 3980



- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection • max. flow 7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain. ATTENTION: Separate terms and conditions for electronic articles are applicable.

Individual components of this set

You need the following components for this set



42 765 970 90

13 721 980-00

1x





ST 010 107 3980



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
 - suitable for thermal disinfection
 - adjustable follow-up time
 - high-frequency sensors with self-calibration
 - magnetic valve
 - temperature setting via thermostat
 - 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power

supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting

materials (e.g. steel. river stone). Cannot be combined with basins that have a Closing drain. ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

35 741 970 90

Required miscellaneous



temperature setting for combining with wall-mounted fittings -•max. recess depth 125 mm •min. recess depth 90 mm

Recommended miscellaneous

Extension for Touchfree 500 mm - 12 765 970 90


Required miscellaneous




eSET Touchfree Basin mixer with 35 740 970 90 temperature setting for combining with free-standing fittings -



ST 010 107 3980 mm [inches]






| Certificates | | | | |
|--------------|---------------|------------|--|---|
| LGA_29120. | WRAS_1906116. | IAPMO_EGS. | CE000001_eSet_Tou CE000002_e chfree_20171206_D chfree_2017 E_signed. N_signed. | - |
| | | | | |

LGA_29119.



ST 010 107 3980

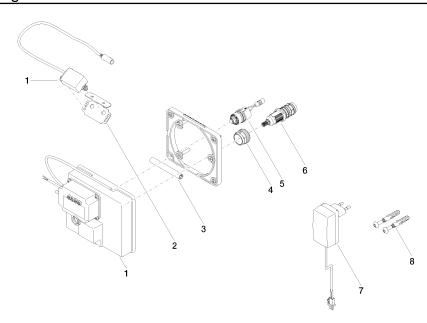

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1 | 90 10 01 177 00 90 | electronic accessories | 1 | 2 |
| 2 | 90 17 20 199 00 90 | holder | 1 | 2 |
| 3 | 90 23 01 124 00 90 | sleeve | 1 | 2 |
| 4 | 09 23 10 129 90 | nut | 1 | 2 |
| 5 | 04 30 50 079 00 90 | valve | 1 | 2 |
| 6 | 90 15 02 013 00 90 | cartridge | 1 | 2 |
| 7 | 04 10 01 246 00 90 | electronic accessories | 1 | 2 |
| 8 | 04 30 31 024 01 90 | fixing set | 1 | 2 |







- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- rosette 60 x 60 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free







Flow rate chart



Certificates

ETA_18519. LGA_18651.



