








ST 060 100 2671





- cover plate 120 x 120 mm
- rosette 60 x 60 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- 2x head part with cut-to-length spindle and sleeve


	Brushed Platinum	ST 060 100 2671-06
	Chrome	ST 060 100 2671-00
	Dark Chrome	ST 060 100 2671-19
	Brushed Light Gold	ST 060 100 2671-27
	Matte Black	ST 060 100 2671-33
	Brushed Chrome	ST 060 100 2671-93
	Brushed Dark Platinum	ST 060 100 2671-99

Individual components of this set








You need the following components for this set



ST 060 100 2671



- rosette Ø 60 mm
- head part with cut-to-length spindle and sleeve


	Brushed Platinum	36 607 671-06
	Chrome	36 607 671-00
	Dark Chrome	36 607 671-19
	Brushed Light Gold	36 607 671-27
	Matte Black	36 607 671-33
	Brushed Chrome	36 607 671-93
	Brushed Dark Platinum	36 607 671-99

Required miscellaneous



- Wall valve 1/2" -** 35 607 970 90
- min. recess depth 105 mm
 - max. recess depth 150 mm

ST 060 100 2671

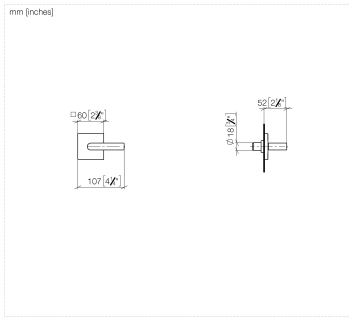

Fits: IMO, MEM, CL.1, CYO

- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS 2011026

	Brushed Platinum	36 503 780-06
	Chrome	36 503 780-00
	Platinum	36 503 780-08
	Dark Chrome	36 503 780-19
	Brushed Light Gold	36 503 780-27
	Brushed Durabronze (23kt Gold)	36 503 780-28
	Matte Black	36 503 780-33
	Brushed Champagne (22kt Gold)	36 503 780-46
	Champagne (22kt Gold)	36 503 780-47
	Brushed Chrome	36 503 780-93
	Brushed Dark Platinum	36 503 780-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control - 35 503 970 90
 •max. recess depth 155 mm
 •min. recess depth 115 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90


Required miscellaneous




xGRID Installation track 555 mm - 12 360 970 90

ST 060 100 2671

mm [inches]

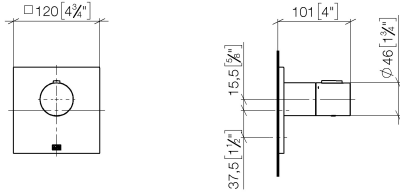

Flow rate chart

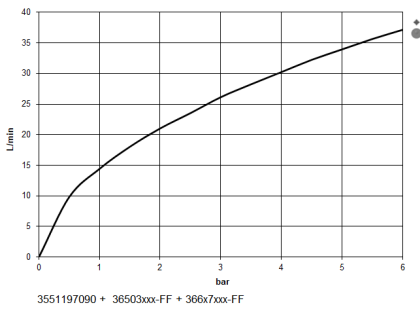

Certificates


WRAS_2011026.

DVGW_DW-
6512DN0706.

LGA_29930.

LGA_29932.

ST 060 100 2671

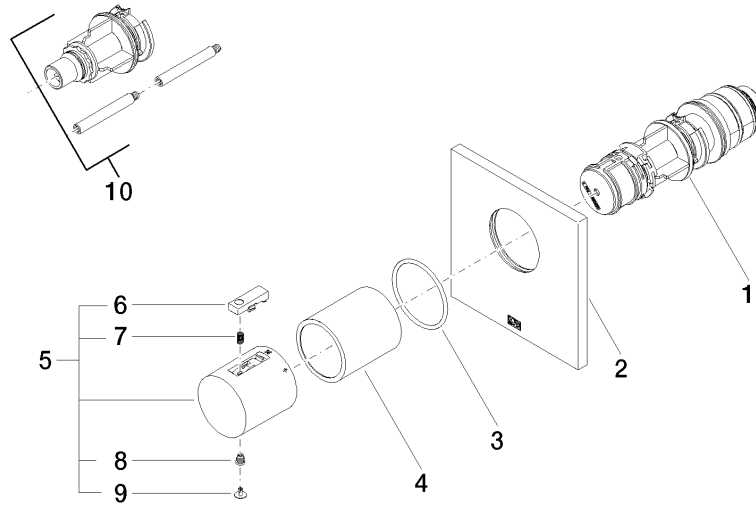

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 02 063 00 90	cartridge	1	2
2	09 11 02 196-06	cover	1	60
3	90 14 10 049 00 90	seal	1	2
4	90 21 02 112 00-06	sleeve	1	10
5	90 17 33 004 00-06	handle	1	10
6	90 21 33 011 00-13	handle	1	2
7	90 16 02 027 00 90	spring	1	2
8	90 30 30 136 00 90	screw	1	2
9	90 31 20 049 00-13	plug	1	30
10	12 178 970 90	Extension 46 mm -	1	2