


## Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Durabrand (23kt Gold)

IMO

28 041 980



Fits: IMO, LULU, MEM, CL.1, CYO

- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Not suitable for use in a steam room.
- WRAS 240502006

	Brushed Durabrand (23kt Gold)	28 041 980-28
	Chrome	28 041 980-00
	Brushed Platinum	28 041 980-06
	Platinum	28 041 980-08
	Matte Black	28 041 980-33
	Brushed Champagne (22kt Gold)	28 041 980-46
	Champagne (22kt Gold)	28 041 980-47
	Brushed Chrome	28 041 980-93
	Brushed Dark Platinum	28 041 980-99

### Required miscellaneous




#### **Concealed ceiling installation box with ceiling fixing -** 35 041 970 90

- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" outlet
- concealed rough parts


## Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Durabron (23kt Gold)

IMO

28 041 980  
mm [inches]

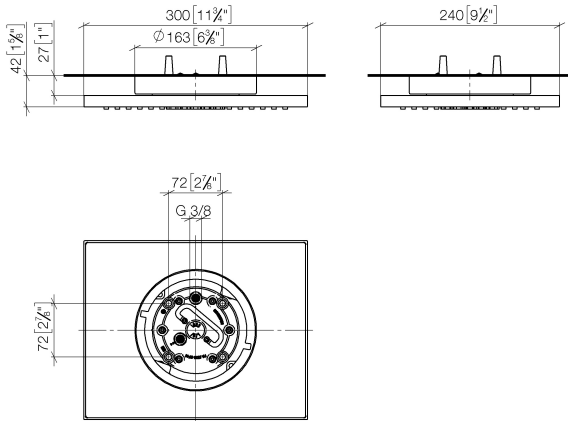

### Flow rate chart

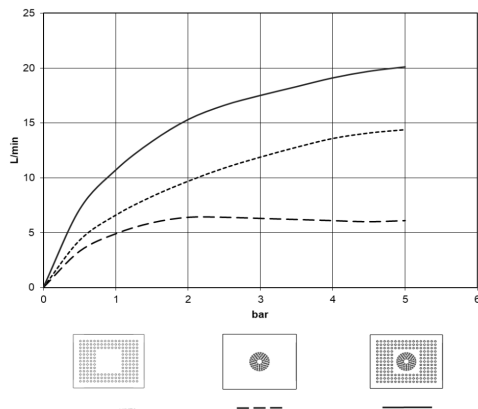

### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Durabronz (23kt Gold)

---

IMO

28 041 980

Certificates

---

LGA\_38


WRAS\_240502

**Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed  
Durabrass (23kt Gold)**

IMO

28 041 980

**Product version from 5/1/2022**

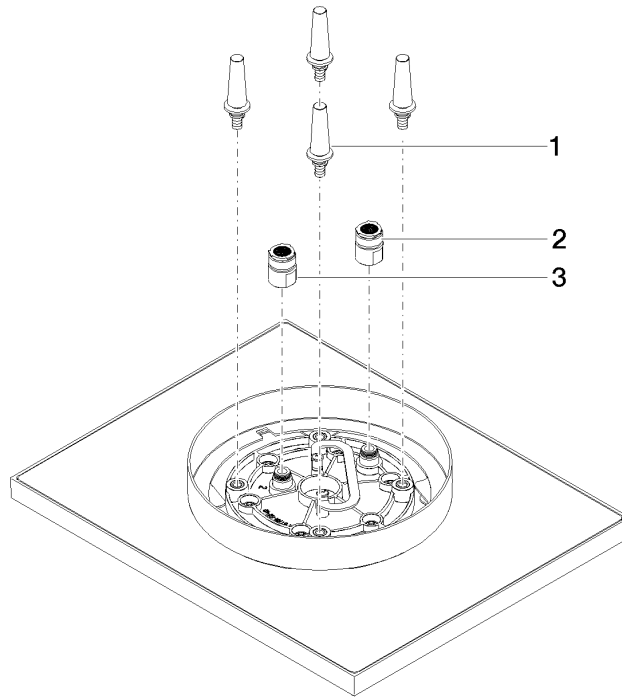



Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed  
Durabrass (23kt Gold)

IMO

28 041 980

**Spare parts list**

**Product version from 5/1/2022**

No.	Item Number	Name	Quantity used	Delivery time
	90 17 20 263 00 90	fixing set	3	2