

# Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Light Gold SERIES SPECIFIC

28 044 980    Product version from 5/1/2022



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

### Technical data:

- min. recess depth 137 mm

### Ceiling module power supply

- 12V DC (CV)

### Electric:

### Spot lighting

- LED coloured light RGBW

### Ambient lighting

- Bulbs protected against splashing water

### Activation

- Provided by customer: Zigbee gateway
- ZigBee Light Link RGBW controller

### Environment

### Planning tips:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

**includes light bulbs with a Class G energy efficiency**

includes light bulbs with a Class G energy efficiency

|   |                                |               |
|---|--------------------------------|---------------|
|    | Brushed Light Gold             | 28 044 980-27 |
|    | Chrome                         | 28 044 980-00 |
|    | Brushed Platinum               | 28 044 980-06 |
|    | Platinum                       | 28 044 980-08 |
|    | Dark Chrome                    | 28 044 980-19 |
|    | Brushed Durabronze (23kt Gold) | 28 044 980-28 |
|    | Matte Black                    | 28 044 980-33 |
|    | Brushed Champagne (22kt Gold)  | 28 044 980-46 |
|    | Champagne (22kt Gold)          | 28 044 980-47 |
|   | Brushed Chrome                 | 28 044 980-93 |
|  | Brushed Dark Platinum          | 28 044 980-99 |

## Required miscellaneous



### Concealed ceiling installation box for recessed ceiling installation with light - 35 044 970 90

- concealed rough parts
- flush-mounted installation box 360x300 mm RAL 9003 signal white
- recess depth 137mm
- Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class 2
- ZigBee Light Link RGBW controller

## Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Light Gold

28 044 980 Product version from 5/1/2022

mm [inches]



### Flow rate chart



### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

### Ü-Zeichen



## Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Light Gold SERIES SPECIFIC

---

28 044 980 Product version from 5/1/2022

Certificates and sustainability


---

LGA\_38

WRAS\_240502

# Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Light Gold

28 044 980 Product version from 5/1/2022

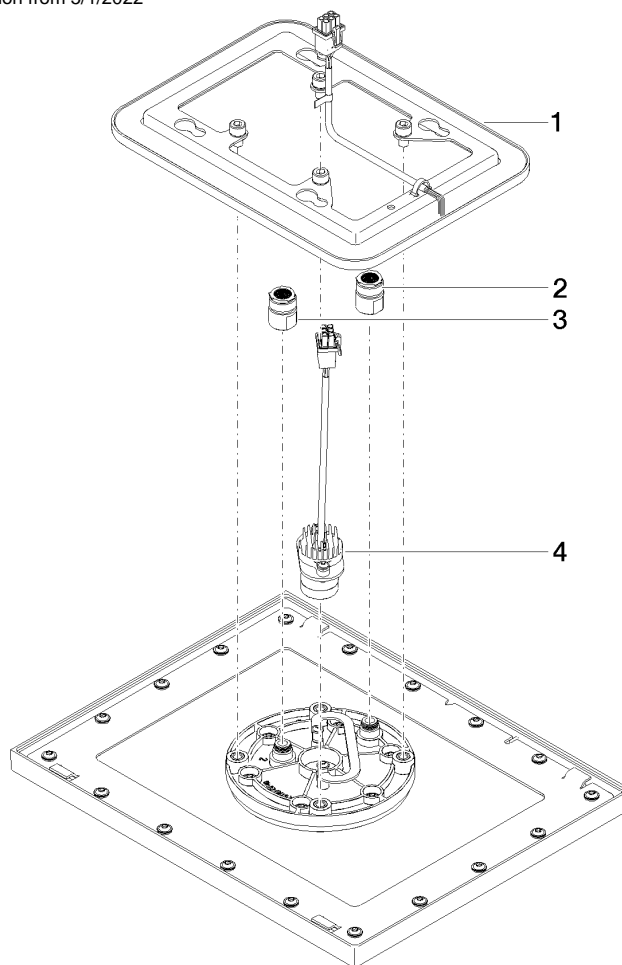

## Spare parts list

| No. | Item Number        | Name                   | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 2   | 90 24 03 309 01 90 | connection             | 1.00          | 2             |
| 1   | 90 10 01 224 00 90 | electronic accessories | 1.00          | 2             |
| 4   | 90 10 01 225 00 90 | electronic accessories | 1.00          | 2             |
| 3   | 90 24 03 309 00 90 | connection             | 1.00          | 2             |