

**Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed** **SERIES SPECIFIC**  
**Champagne (22kt Gold)**

28 044 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

**Technical data:**

- min. recess depth 137 mm

**Ceiling module power supply**

- 12V DC (CV)

**Electric:**

**Spot lighting**

- LED coloured light RGBW

**Ambient lighting**

- Bulbs protected against splashing water

**Activation**

- Provided by customer: Zigbee gateway
- ZigBee Light Link RGBW controller

**Environment**

**Planning tips:**

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

**includes light bulbs with a Class G energy efficiency**

includes light bulbs with a Class G energy efficiency

	Brushed Champagne (22kt Gold)	28 044 980-46
	Chrome	28 044 980-00
	Brushed Platinum	28 044 980-06
	Platinum	28 044 980-08
	Dark Chrome	28 044 980-19
	Brushed Light Gold	28 044 980-27
	Brushed Durabrass (23kt Gold)	28 044 980-28
	Matte Black	28 044 980-33
	Champagne (22kt Gold)	28 044 980-47
	Brushed Chrome	28 044 980-93
	Brushed Dark Platinum	28 044 980-99

**Required miscellaneous**



**Concealed ceiling installation box for recessed ceiling installation with light -** 35 044 970 90

- concealed rough parts
- flush-mounted installation box 360x300 mm RAL 9003 signal white
- recess depth 137mm
- Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class 2
- ZigBee Light Link RGBW controller

## Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Champagne (22kt Gold)

28 044 980 Product version from 5/1/2022

mm [inches]



### Flow rate chart



### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

### Ü-Zeichen



## Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Champagne (22kt Gold) SERIES SPECIFIC

---

28 044 980 Product version from 5/1/2022

Certificates and sustainability

---


LGA\_38

WRAS\_240502

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed  
Champagne (22kt Gold)

SERIES SPECIFIC

28 044 980    Product version from 5/1/2022

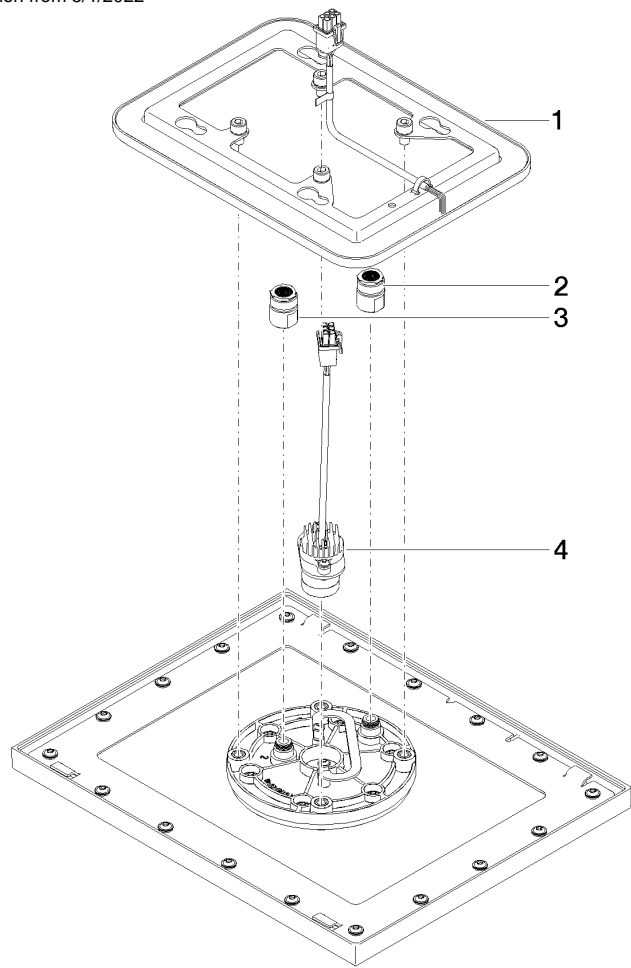

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
3	90 24 03 309 00 90	connection	1.00	2
2	90 24 03 309 01 90	connection	1.00	2
4	90 10 01 225 00 90	electronic accessories	1.00	2
1	90 10 01 224 00 90	electronic accessories	1.00	2