

Concealed thermostat with built-in isolators -

35 426 970 90



- pre-seal
- lead-free, dezincification resistant
- 2x back flow preventer
- 2x female thread 1/2" connections
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- suitable for xGRID (when using installation track + 12 mm recess depth)
- gauge 70 mm
- WRAS 1906098

Recommended miscellaneous



**Drybox Concealed thermostat -** 39 426 970 90  
• Overflow is part of the scope of delivery.

Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

Required miscellaneous




**xGRID Installation track 555 mm -** 12 360 970 90


### Concealed thermostat with built-in isolators -

35 426 970 90

mm [inches]

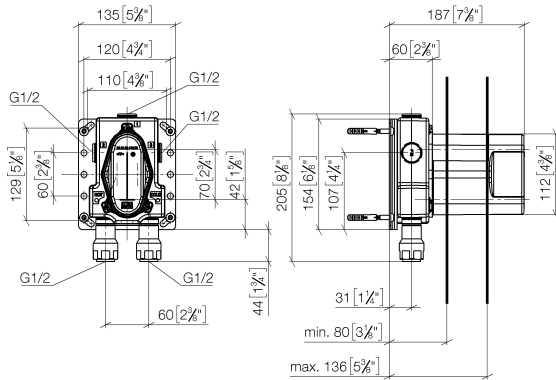

### Flow rate chart

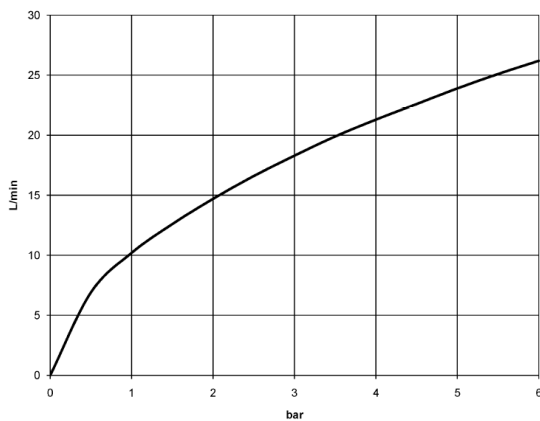

## Codes & Standards

EN 1111

EN 1717

Scottish Water  
Byelaws

## UK Water Supply Regulations

## VA-Zeichen



## Concealed thermostat with built-in isolators -

---

35 426 970 90

### Certificates

---


WRAS\_1906

DVGW\_DW-  
6512DN0

Belgaqua\_21-031-2 ETA\_20

## Concealed thermostat with built-in isolators -

35 426 970 90

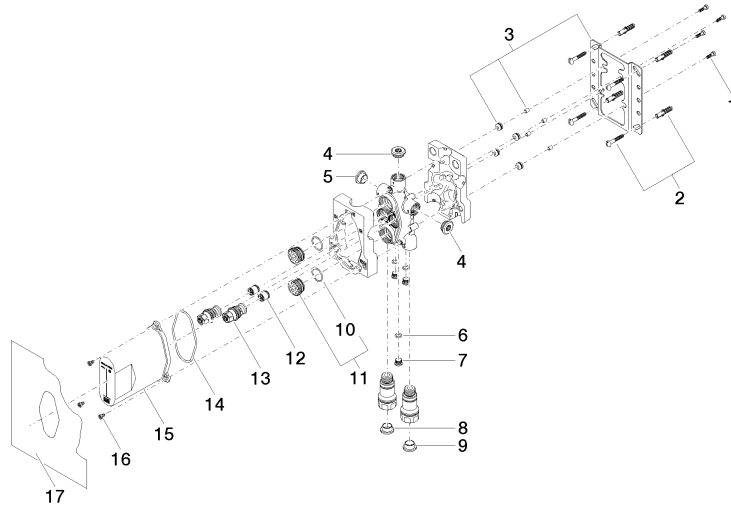



Concealed thermostat with built-in isolators -

35 426 970 90

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	09 30 30 171 90	screw	32	2