

Concealed thermostat -

35 427 970 90



- lead-free, dezincification resistant
- 2x back flow preventer
- 2x female thread 1/2" connections
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- gauge 70 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)
- WRAS 1906098

Can only be combined with exposed trim parts 36 427 SSS-FF

Recommended miscellaneous



**Drybox Concealed thermostat -** 39 426 970 90  
● Overflow is part of the scope of delivery.

Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

Required miscellaneous




**xGRID Installation track 555 mm -** 12 360 970 90


Concealed thermostat -

35 427 970 90

mm [inches]

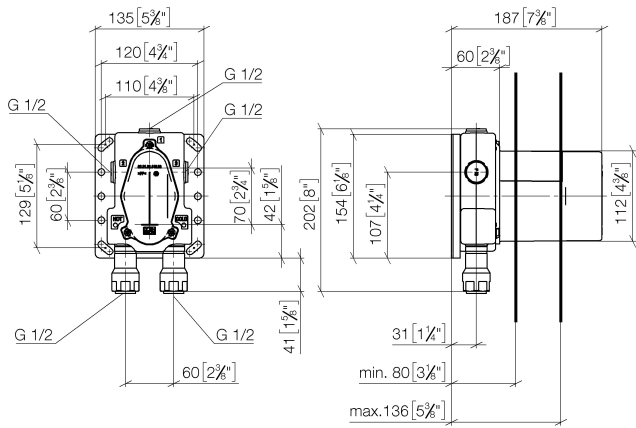

Flow rate chart

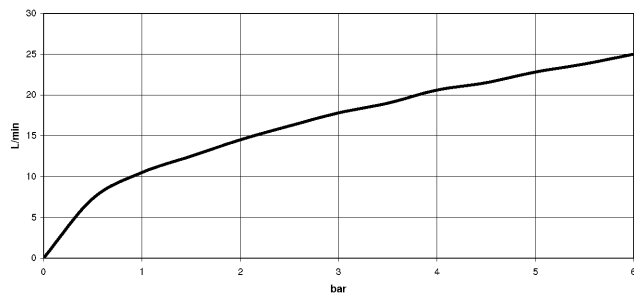

Codes & Standards

EN 1111

EN 1717

Scottish Water  
Byelaws

UK Water Supply  
Regulations



## Concealed thermostat -

---

35 427 970 90

### Certificates


---

WRAS_1906	Belgaqua_22_279_2	DVGW_DW-6512DN0
-----------	-------------------	-----------------

## Concealed thermostat -

35 427 970 90

**Product version from 3/13/2017**

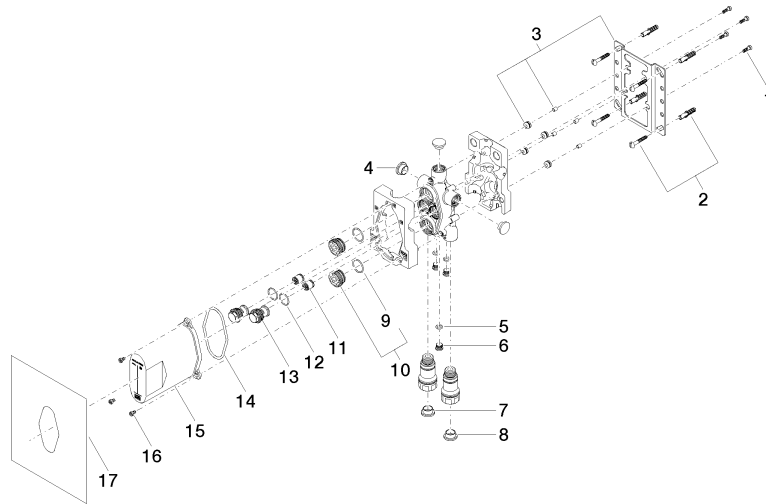



Concealed thermostat -

35 427 970 90

Spare parts list

Product version from 3/13/2017

No.	Item Number	Name	Quantity used	Delivery time
	09 30 30 171 90	screw	34	2