







28 528 360



- spray head Ø 55mm
- ball-joint pivotable through 25° (in any direction)
- HORIZONTAL RAIN, max. flow rate 7 l/min (at 3 bar)
- rosette Ø 55 mm
- 1/2" connection

	Durabronss (23kt Gold)	28 528 360-09
	Chrome	28 528 360-00
	Brushed Platinum	28 528 360-06
	Platinum	28 528 360-08
	Brushed Durabronss (23kt Gold)	28 528 360-28
	Brushed Dark Platinum	28 528 360-99

**Recommended miscellaneous**


**Concealed wall elbow -** 35 085 970 90




- max. recess depth 163 mm
- min. recess depth 90 mm

28 528 360

mm [inches]




### Flow rate chart

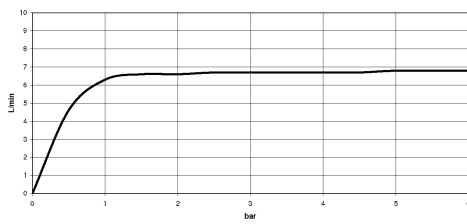

### Certificates

LGA\_38652.

28 528 360

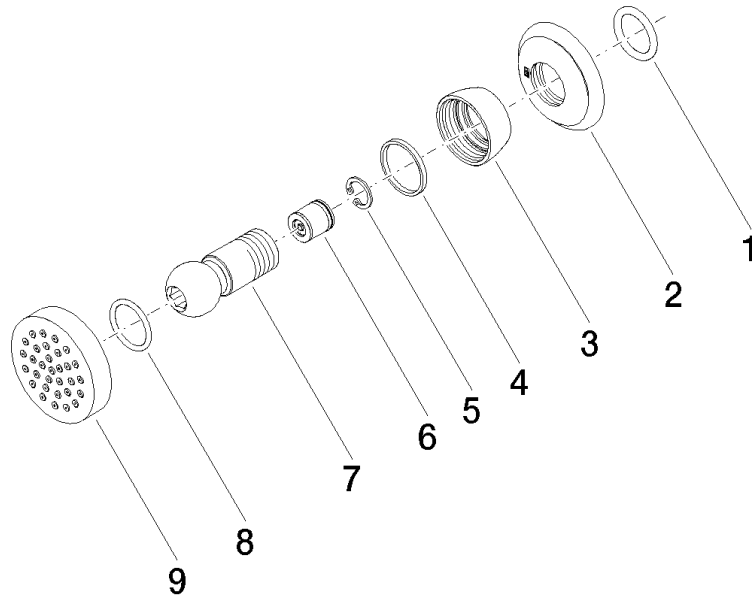

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 14 10 026 00 90	seal	1	2
2	09 27 35 003-09	rosette	1	40
3	09 23 30 027-09	nut	1	60
4	09 14 15 010 90	ring	1	2
5	09 16 01 014 90	ring	1	2
6	90 23 01 147 00 90	back-flow preventer	1	2
7	09 21 40 016-09	connection	1	40
8	09 14 10 015 90	seal	1	2
9	90 12 05 027 00-09	casing ( completely )	1	-

Spare part can no longer be ordered, please order the replacement item