

Rain shower with wall fixing 400 mm - Dark Chrome

SERIES SPECIFIC

28 659 970



- rain shower Ø 400 mm
- PURE RAIN, max. flow rate 20 l/min (at 3 bar)
- Function from: 12 l/min
- with anti-scale system













Technical data:

- 450mm projection
- rosette Ø 60 mm
- 1/2" connection

Notes:

- WRAS

Product change as of 1st April 2024: max. flow 20l/min

| | | |
|---|--------------------------------|---------------|
|  | Dark Chrome | 28 659 970-19 |
|  | Chrome | 28 659 970-00 |
|  | Brushed Platinum | 28 659 970-06 |
|  | Platinum | 28 659 970-08 |
|  | Light Gold | 28 659 970-26 |
|  | Brushed Light Gold | 28 659 970-27 |
|  | Brushed Durabronze (23kt Gold) | 28 659 970-28 |
|  | Matte Black | 28 659 970-33 |
|  | Brushed Dark Brass | 28 659 970-39 |
|  | Brushed Bronze | 28 659 970-42 |
|  | Brushed Champagne (22kt Gold) | 28 659 970-46 |
|  | Champagne (22kt Gold) | 28 659 970-47 |
|  | Brushed Chrome | 28 659 970-93 |
|  | Brushed Dark Platinum | 28 659 970-99 |

Recommended miscellaneous

Concealed wall elbow -

35 085 970 90




- max. recess depth 163 mm
- min. recess depth 90 mm

28 659 970



Flow rate chart

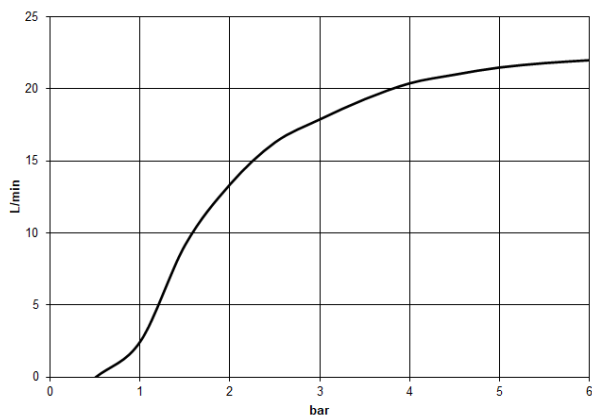

Codes & Standards

DIN 4109

EN 1112

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower with wall fixing 400 mm - Dark Chrome

SERIES SPECIFIC

28 659 970

Certificates and sustainability

| | | | |
|--------|--------|-----------|-----------------|
| LGA_29 | LGA_29 | WRAS_2212 | DVGW_DW-6517DN0 |
|--------|--------|-----------|-----------------|

28 659 970

