















WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome


13 425 979




- 22mm projection
- PEARLSTREAM
- plate 240 mm x 60 mm
- connection 1/2", for shortening
- plug-link mounting
- Max. flow rate 9.5 l/min (at 3 bar)

	Dark Chrome	13 425 979-19
	Chrome	13 425 979-00
	Brushed Platinum	13 425 979-06
	Platinum	13 425 979-08
	Light Gold	13 425 979-26
	Brushed Light Gold	13 425 979-27
	Brushed Durabrass (23kt Gold)	13 425 979-28
	Matte Black	13 425 979-33
	Brushed Bronze	13 425 979-42
	Brushed Champagne (22kt Gold)	13 425 979-46
	Champagne (22kt Gold)	13 425 979-47
	Brushed Chrome	13 425 979-93
	Brushed Dark Platinum	13 425 979-99

Recommended miscellaneous

<div>  </div>	<div> <div>Concealed wall elbow -</div> <ul style="list-style-type: none"> • max. recess depth mm • min. recess depth mm </div>	35 085 970 90
--	---	---------------


Recommended miscellaneous

<div>  </div>	<div> <div>Concealed wall elbow -</div> <ul style="list-style-type: none"> • max. recess depth mm • min. recess depth mm </div>	35 085 970 90
--	---	---------------




WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome


13 425 979
mm [inches]

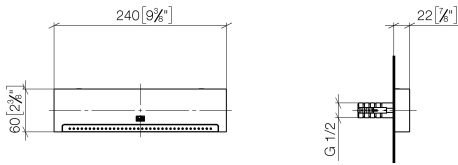

Flow rate chart

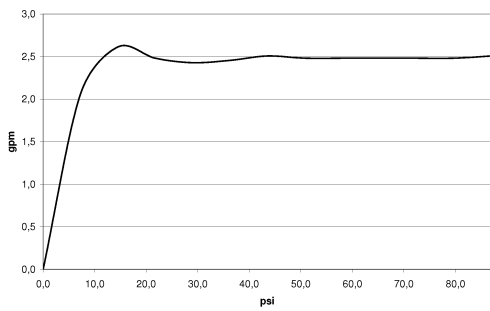

Trajectory diagram

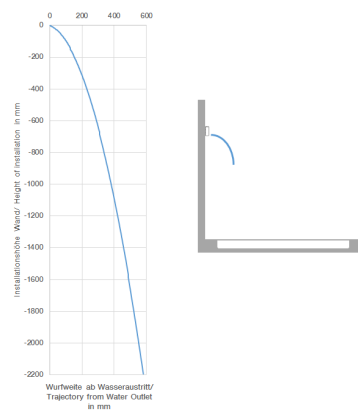

Codes & Standards

ASME A112.18.1 cUPC DIN 4109 ISO 3822

Ü-Zeichen



WATER FALL Cascade spout with individual jets for wall mounting - Dark
Chrome

13 425 979
Certificates

LGA_19 IAPMO_4976

WATER FALL Cascade spout with individual jets for wall mounting - Dark Chrome

13 425 979

