

Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold **SERIES SPECIFIC**

28 034 970 Product version from 5/1/2022



- rain shower Ø 300 mm
 - PURE RAIN, max. flow rate 12 l/min (at 3 bar)
 - PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
 - with anti-scale system
- Technical data:**
- min. recess depth 137 mm
- Ceiling module power supply**
- 12V DC (CV)
- electrical:**
- Ambient lighting**
- Spot lighting**
- LED coloured light RGBW
 - LED coloured light RGBW
- Activation**
- ZigBee Light Link RGBW controller
 - Provided by customer: Zigbee gateway
 - Bulbs protected against splashing water
- Environment**
- Planning tips:**
- Not suitable for outdoor use.
 - Not suitable for use in a steam room.
 - Not suitable for use in chlorinated or salty environments.
 - Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
 - Dornbracht recommends consulting a systems integrator.
 - WRAS

	Brushed Light Gold	28 034 970-27
	Chrome	28 034 970-00
	Brushed Platinum	28 034 970-06
	Platinum	28 034 970-08
	Dark Chrome	28 034 970-19
	Light Gold	28 034 970-26
	Brushed Durabronze (23kt Gold)	28 034 970-28
	Matte Black	28 034 970-33
	Brushed Dark Brass	28 034 970-39
	Brushed Bronze	28 034 970-42
	Brushed Champagne (22kt Gold)	28 034 970-46
	Champagne (22kt Gold)	28 034 970-47
	Brushed Chrome	28 034 970-93
	Brushed Dark Platinum	28 034 970-99


Required miscellaneous



- Concealed ceiling installation box for recessed ceiling installation with light -** 35 034 970 90
- concealed rough parts
 - flush-mounted reflection box Ø 360 mm RAL 9003 signal white
 - recess depth 137mm
 - 2x female thread " outlet
 - Input 100-240V AC 50-60Hz
 - Output 12V DC SELV / Class 2
 - ZigBee Light Link RGBW controller

Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold SERIES SPECIFIC

28 034 970 Product version from 5/1/2022
mm [inches]

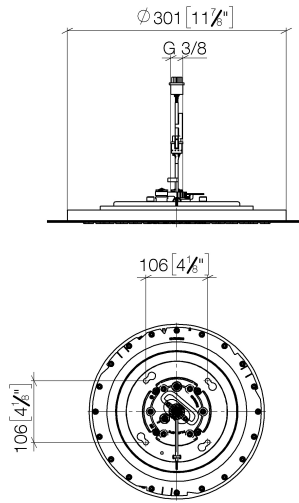

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold SERIES SPECIFIC

28 034 970 Product version from 5/1/2022


Certificates and sustainability

LGA_38

WRAS_240502

Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold SERIES SPECIFIC

28 034 970 Product version from 5/1/2022

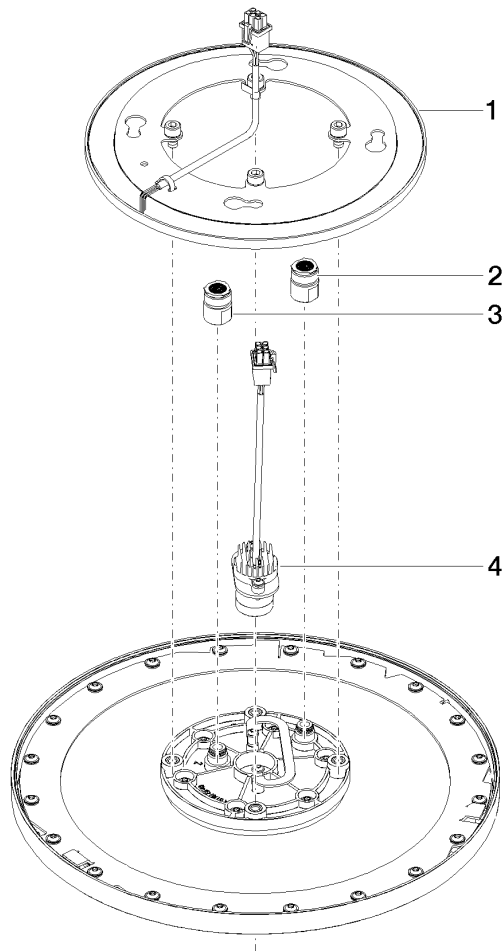

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 221 00 90	electronic accessories	1.00	2
4	90 10 01 225 00 90	electronic accessories	1.00	2
2	90 24 03 309 01 90	connection	1.00	2
3	90 24 03 309 00 90	connection	1.00	2