


MADISON Rain shower with wall fixing 200 mm - Brushed Durabrand (23kt Gold)

MADISON









28 545 977    Product version up to 12/5/2019




- rain shower Ø 200 mm
- PURE RAIN, max. flow rate 14 l/min (at 3 bar)
- Function from: 8 l/min
- with anti-scale system

**Technical data:**

- 435mm projection
- rosette Ø 55 mm
- 1/2" connection

	Brushed Durabrand (23kt Gold)	28 545 977-28
	Chrome	28 545 977-00
	Brushed Platinum	28 545 977-06
	Platinum	28 545 977-08
	Durabrand (23kt Gold)	28 545 977-09
	Brushed Dark Brass	28 545 977-39
	Brushed Chrome	28 545 977-93
	Brushed Dark Platinum	28 545 977-99

Recommended miscellaneous


	<b>Concealed wall elbow -</b>	35 085 970 90
	<ul style="list-style-type: none"> <li>max. recess depth 163 mm</li> <li>min. recess depth 90 mm</li> </ul>	



MADISON Rain shower with wall fixing 200 mm - Brushed Durabron (23kt Gold)

MADISON

28 545 977 Product version up to 12/5/2019  
mm [inches]

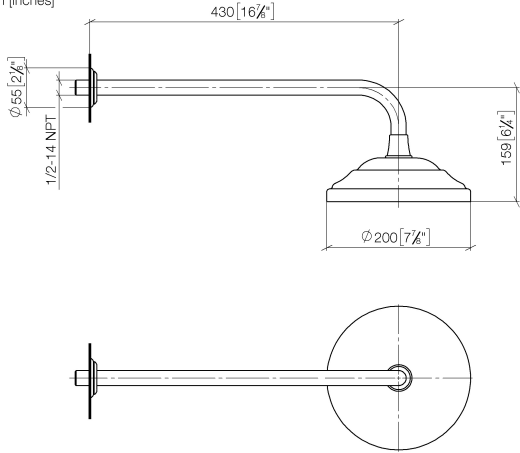

Flow rate chart



Codes & Standards

DIN 4109

EN 1112

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



MADISON Rain shower with wall fixing 200 mm - Brushed Durabronss (23kt Gold)

MADISON

28 545 977 Product version up to 12/5/2019

Certificates and sustainability

DVGW_DW- 6517DN0	LGA_38	WRAS_250102
---------------------	--------	-------------



Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	4 28 535 977-28	shower	1.00	60
	3 09 11 03 017-28	connection	1.00	60
	1 09 27 35 003-28	rosette	1.00	60
	2 90 14 10 026 00 90	seal	1.00	2