


Concealed single-lever mixer with backflow preventor -

35 021 970 90




- lead-free, dezincification resistant
- safety combination
- 2x back flow preventer
- 2x male thread 1/2" connection
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- 2x integrated supply stop
- gauge 60 mm
- WRAS 2207012


Recommended miscellaneous

Extension 25 mm -	12 191 970 90
	


Recommended miscellaneous

Extension 25 mm -	12 190 970 90
	


Required miscellaneous

Leak protection 1/2" -	12 010 970 90
<ul style="list-style-type: none"> <li>● This article is needed 2x.</li> </ul>	
	

Recommended miscellaneous

xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90
	


Required miscellaneous

xGRID Installation track 555 mm -	12 360 970 90
	


**Concealed single-lever mixer with backflow preventor -**

35 021 970 90

mm [inches]

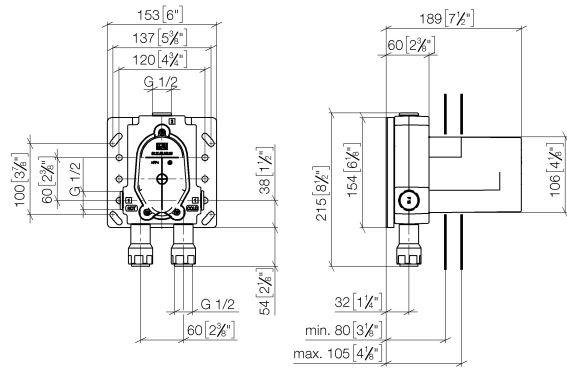

**Flow rate chart**

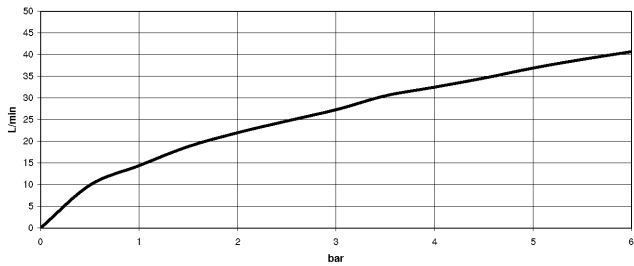

**Codes & Standards**

DIN 4109	EN 1717	EN 817	ISO 3822
Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen	



## Concealed single-lever mixer with backflow preventor -

---

35 021 970 90

### Certificates

---

DVGW\_DW-  
6512DN0


WRAS\_2207

LGA\_19

Belgaqua\_21-385-  
27

## Concealed single-lever mixer with backflow preventor -

35 021 970 90

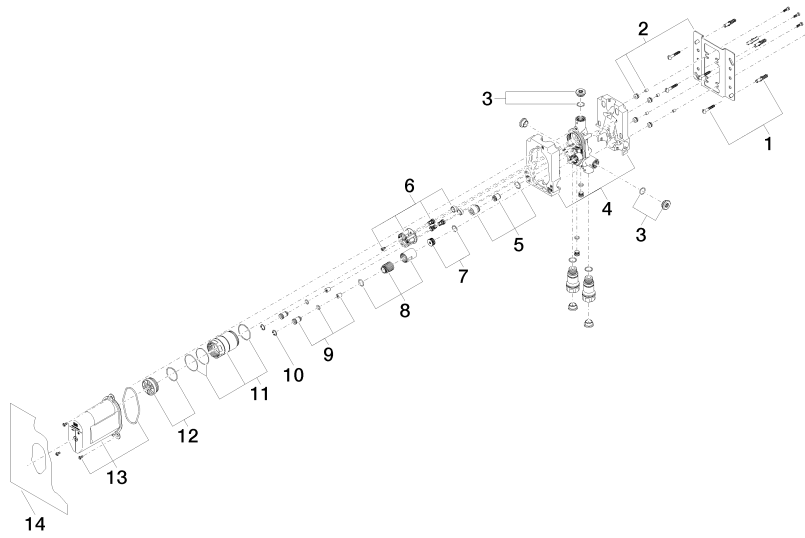



Concealed single-lever mixer with backflow preventor -

35 021 970 90

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	04 30 31 024 01 90	fixing set	18	2