


35 426 970 90




- pre-seal
- lead-free, dezincification resistant
- 2x back flow preventer
- 2x female thread 1/2" connections
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- suitable for xGRID (when using installation track + 12 mm recess depth)
- gauge 70 mm
- WRAS


Required miscellaneous

	Leak protection 1/2" -	12 010 970 90
	•This article is needed 2x.	

Recommended miscellaneous


	xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90
-----------------------------------------------------------------------------------	----------------------------------------------------------------------------	---------------

Required miscellaneous

	xGRID Installation track 555 mm -	12 360 970 90
------------------------------------------------------------------------------------	------------------------------------------	---------------

35 426 970 90

mm [inches]

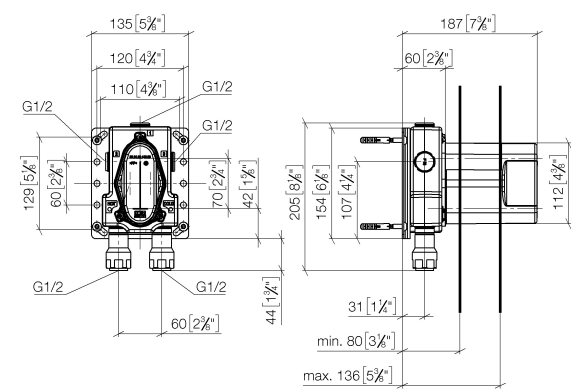


Codes & Standards

EN 1111	EN 1717	Scottish Water Byelaws	UK Water Supply Regulations
VA-Zeichen			

Certificates and sustainability

Belgaqua_21-031-2	ETA_20	DVGW_DW- 6512DN0	WRAS_250402
-------------------	--------	---------------------	-------------

35 426 970 90

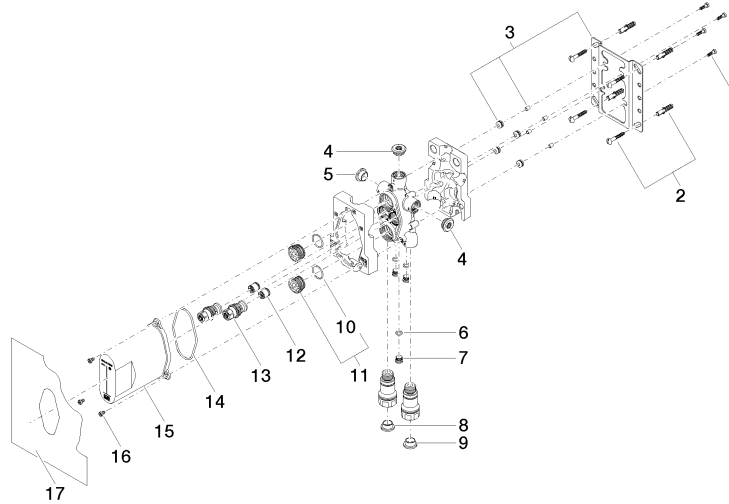

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	12 90 23 01 040 00 90	back-flow preventer	2.00	2
	15 04 21 02 146 00 90	cap	1.00	2
	8 09 31 20 093 90	plug	1.00	2
	16 09 30 30 112 90	screw	3.00	2
	1 09 30 30 171 90	screw	4.00	2
	4 04 31 20 006 00 90	plug	2.00	2
	5 09 31 20 092 90	plug	1.00	2
	13 04 29 05 031 01 90	insert	2.00	2
	2 04 30 31 024 01 90	fixing set	2.00	2
	11 04 30 11 149 00 90	plug	2.00	2
	6 09 14 10 139 90	seal	3.00	2
	10 09 14 10 112 90	seal	2.00	2
	14 09 14 10 512 90	seal	1.00	2
	3 04 17 20 127 00 90	holder	1.00	2
	17 04 14 03 080 00 90	gasket kit	1.00	2
	9 09 31 20 094 90	plug	1.00	2
	7 04 31 20 039 11 90	plug	3.00	2