




Concealed thermostat with built-in isolators -

35 426 970 90




- pre-seal
- lead-free, dezincification resistant
- 2x back flow preventer
- 2x female thread 1/2" connections
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- suitable for xGRID (when using installation track + 12 mm recess depth)
- gauge 70 mm
- WRAS 1906098

Required miscellaneous

	<b>Leak protection 1/2" -</b> • This article is needed 2x.	12 010 970 90
---	---	---------------

Recommended miscellaneous

	<b>xGRID Attachment set for integrating in the dry wall construction -</b>	12 340 970 90
---	--	---------------


Required miscellaneous

	<b>xGRID Installation track 555 mm -</b>	12 360 970 90
--	--	---------------


Concealed thermostat with built-in isolators -

35 426 970 90

mm [inches]

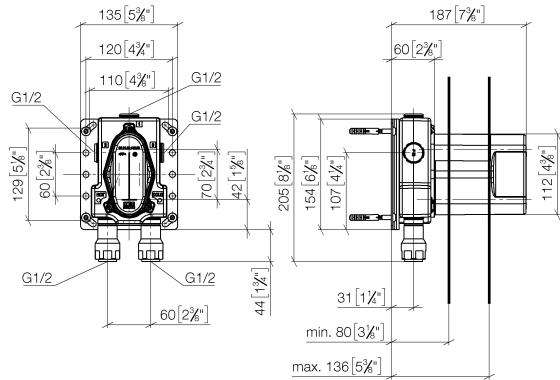

Flow rate chart

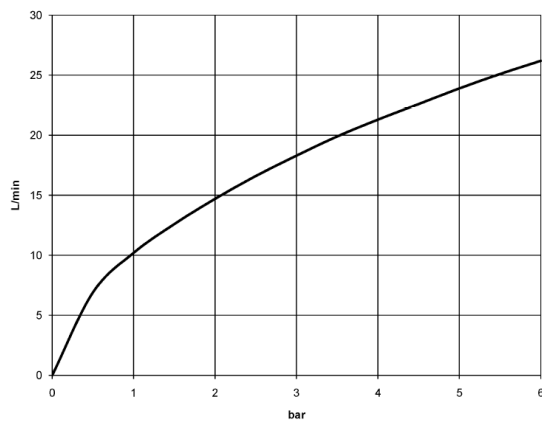

Codes & Standards

EN 1111

EN 1717

Scottish Water  
Byelaws

UK Water Supply  
Regulations

VA-Zeichen



## Concealed thermostat with built-in isolators -

---

35 426 970 90

### Certificates

---


WRAS\_1906

DVGW\_DW-  
6512DN0

Belgaqua\_21-031-2 ETA\_20

## Concealed thermostat with built-in isolators -

35 426 970 90

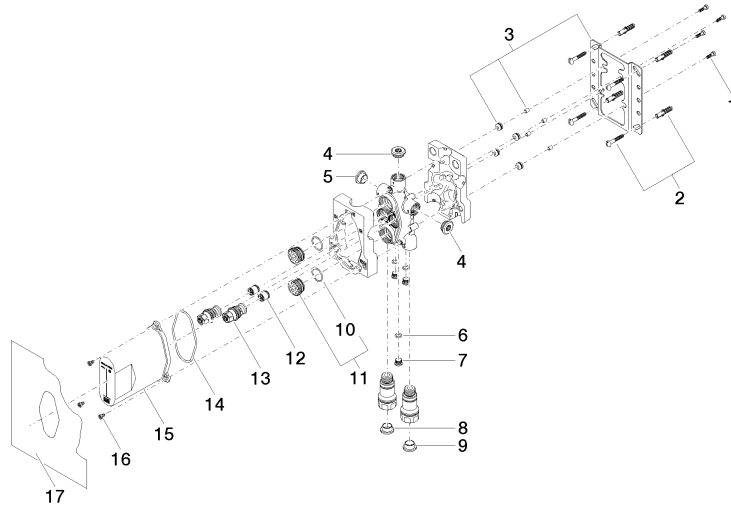



Concealed thermostat with built-in isolators -

35 426 970 90

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	09 30 30 171 90	screw	32	2