

## Concealed thermostat with built-in isolators -

35 428 970 90    Product version from 3/13/2017



- pre-seal
- lead-free, dezincification resistant
- 2x back flow preventer
- 3x outlet G 1/2"
- 2x female thread 1/2" connections
- dust cover
- anti-water packing
- sound and thermal insulation
- gauge 70 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)
- WRAS

**Can only be combined with exposed trim parts  
36 427 SSS-FF**

Can only be combined with exposed trim parts 36  
427 SSS-FF

### Required miscellaneous



**Leak protection 1/2" -**

- This article is needed 2x.

12 010 970 90

### Recommended miscellaneous



**xGRID Attachment set for  
integrating in the dry wall  
construction -**

12 340 970 90

### Required miscellaneous




**xGRID Installation track 555 mm -**    12 360 970 90



Concealed thermostat with built-in isolators -

35 428 970 90    Product version from 3/13/2017

mm [inches]

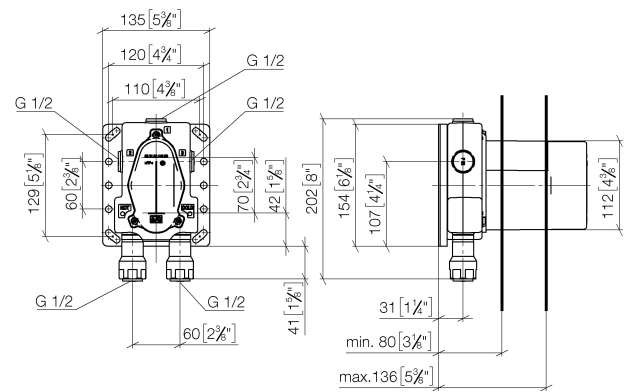

Codes & Standards


EN 1111	EN 1717	Scottish Water Byelaws	UK Water Supply Regulations
---------	---------	---------------------------	--------------------------------

Certificates

Belgaqua_22_279_2	DVGW_DW- 6512DN0	WRAS_1906
-------------------	---------------------	-----------

## Concealed thermostat with built-in isolators -

35 428 970 90 Product version from 3/13/2017

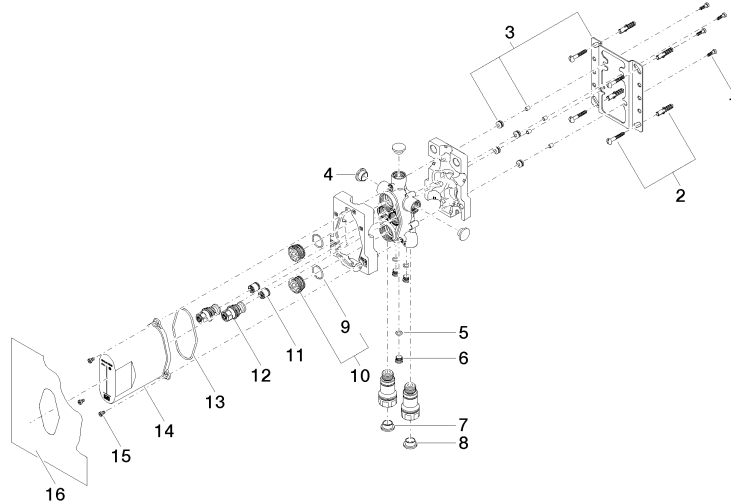

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 30 30 171 90	screw	4	2
2	04 30 31 024 01 90	fixing set	2	2
3	04 17 20 127 00 90	holder	1	2
4	09 31 20 092 90	plug	4	2
5	09 14 10 139 90	seal	3	2
6	04 31 20 039 11 90	plug	3	2
7	09 31 20 093 90	plug	1	2
8	09 31 20 094 90	plug	1	2
9	09 14 10 112 90	seal	2	2
10	04 30 11 149 00 90	plug	2	2
11	90 23 01 040 00 90	back-flow preventer	2	2
12	04 29 05 031 01 90	insert	2	2
13	09 14 10 512 90	seal	1	2
14	04 21 02 146 00 90	cap	1	2
15	09 30 30 112 90	screw	3	2
16	04 14 03 080 00 90	gasket kit	1	2