





- pre-seal
 - lead-free, dezincification resistant
 - 2x back flow preventer
 - 3x outlet G 1/2"
 - 2x female thread 1/2" connections
 - dust cover
 - anti-water packing
 - sound and thermal insulation
 - gauge 70 mm
 - suitable for xGRID (when using installation track + 12 mm recess depth)
 - WRAS
- Can only be combined with exposed trim parts 36 427 SSS-FF**
- Can only be combined with exposed trim parts 36 427 SSS-FF


Required miscellaneous

	Leak protection 1/2" -	12 010 970 90
	•This article is needed 2x.	

Recommended miscellaneous

	xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90

Required miscellaneous

	xGRID Installation track 555 mm -	12 360 970 90


Concealed thermostat with built-in isolators -

SERIES-VARIOUS

35 428 970 90

Product version from 3/13/2017

mm [inches]

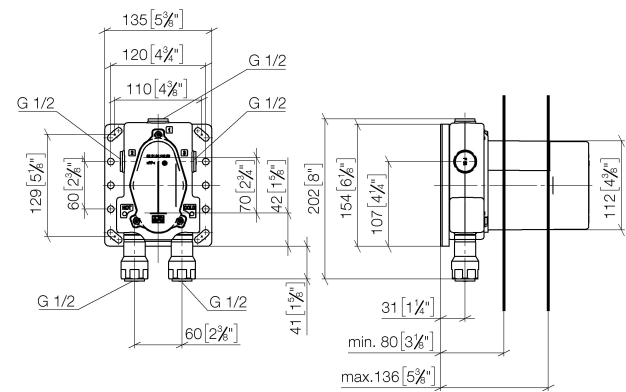


Codes & Standards

EN 1111	EN 1717	Scottish Water Byelaws	UK Water Supply Regulations
---------	---------	------------------------	-----------------------------

Certificates and sustainability

Belgaqua_22_279_2	DVGW_DW-6512DN0	WRAS_250402
-------------------	-----------------	-------------

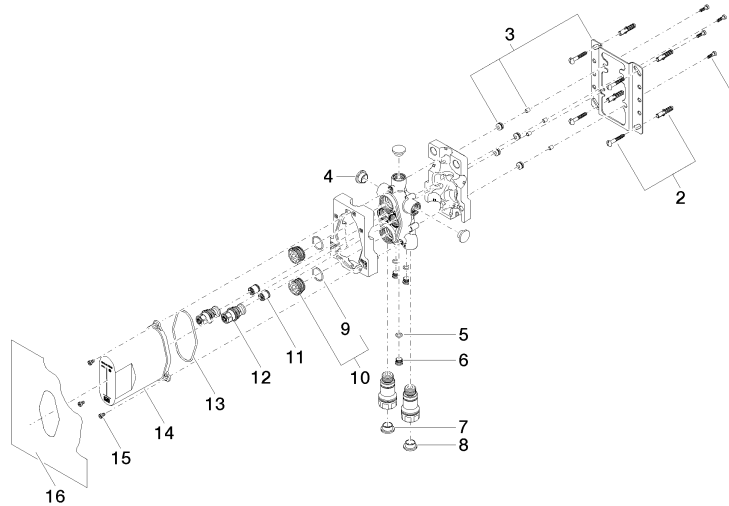

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
7	09 31 20 093 90	plug	1.00	2
1	09 30 30 171 90	screw	4.00	2
2	04 30 31 024 01 90	fixing set	2.00	2
8	09 31 20 094 90	plug	1.00	2
3	04 17 20 127 00 90	holder	1.00	2
11	90 23 01 040 00 90	back-flow preventer	2.00	2
4	09 31 20 092 90	plug	4.00	2
9	09 14 10 112 90	seal	2.00	2
14	04 21 02 146 00 90	cap	1.00	2
16	04 14 03 080 00 90	gasket kit	1.00	2
10	04 30 11 149 00 90	plug	2.00	2
13	09 14 10 512 90	seal	1.00	2
12	04 29 05 031 01 90	insert	2.00	2
15	09 30 30 112 90	screw	3.00	2
5	09 14 10 139 90	seal	3.00	2
6	04 31 20 039 11 90	plug	3.00	2