

## SERIES-VARIOUS AQUAHALO Concealed ceiling installation box - Chrome

35 750 970 Product version from 4/1/2024



- concealed rough parts
- Rain panel with 3 different flow modes
- AQUACIRCLE RAIN: Circular rain curtain, max. flow rate 14 l/min (at 3 bar)
- TEMPEST RAIN: Natural rain, max. flow rate 9 l/min (at 3 bar)
- DIAMOND RAIN: Ring of rain, max. flow rate 6.8 l/min (at 3 bar)
- Ceiling installation enclosure 605 x 605 x 95 mm
- Weight: 10 kg
- min. recess depth 110 mm
- max. recess depth 150 mm
- For simultaneous control of the jet types, we recommend the xTool thermostat module

### Separate LED power supply

#### Input LED power supply

- Input 100-240V AC 50-60Hz

#### Output LED power supply

- 350mA (CC)

#### Output specification LED power supply

- SELV (Safety Extra Low Voltage)
- Class 2

#### Ceiling module power supply

- 350mA (CC)
- Supply pipe 7 m

#### Spot lighting

- LED colour temperature approx. 3000 K
- Bulbs protected against splashing water
- Contains energy efficiency class bulbs
- Technology: LED, not dimmable
- Provided by customer: Light switch

#### Environment

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).

Pre-assembly kit for three-way diverter included

|  |                               |               |
|--|-------------------------------|---------------|
|  | Chrome                        | 35 750 970-00 |
|  | Brushed Platinum              | 35 750 970-06 |
|  | Matte Black                   | 35 750 970-33 |
|  | Brushed Champagne (22kt Gold) | 35 750 970-46 |
|  | Champagne (22kt Gold)         | 35 750 970-47 |

## Required miscellaneous




**SERIES-VARIOUS AQUAHALO**  
**Rain panel - Chrome**

41 750 979-00

## SERIES-VARIOUS AQUAHALO Concealed ceiling installation box - Chrome

35 750 970 Product version from 4/1/2024

mm [inches] 1 : 10

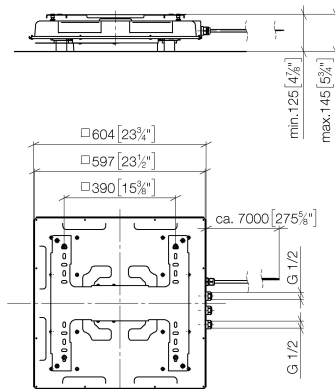

### Codes & Standards

DIN 4109

ISO 3822


Ü-Zeichen

### Certificates

LGA\_38

## SERIES-VARIOUS AQUAHALO Concealed ceiling installation box - Chrome

35 750 970 Product version from 4/1/2024

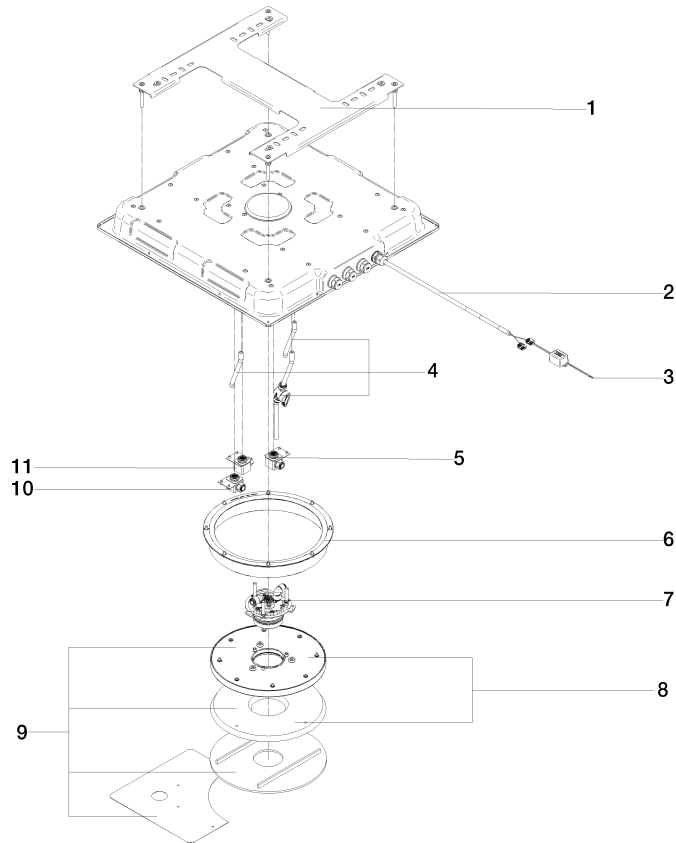

### Spare parts list

| No.  | Item Number        | Name                      | Quantity used | Delivery time |
|--|--------------------|---------------------------|---------------|---------------|
| 1  | 90 17 20 287 02 90 | flange                    | 1             | 2             |
| 2  | 90 10 01 227 00 90 | electronic accessories    | 1             | 2             |
| 3  | 90 10 01 257 00 90 | electronic accessories    | 1             | 2             |
| 4  | 90 24 04 389 00 90 | Flushing service kit      | 1             | 2             |
| 5  | 90 24 04 605 02 90 | cartridge                 | 1             | 2             |
| 6  | 90 21 02 439 00 90 | Repair kit                | 1             | -             |
| Spare part can no longer be ordered, please order the replacement item |                    |                           |               |               |
| 7  | 90 17 09 062 16-00 | Spray module Diamond Rain | 1             | 10            |
| 8  | 90 31 20 071 00 90 | rosette                   | 1             | 2             |
| 9  | 90 91 42 097 00 90 | Installation kit          | 1             | -             |
| Spare part can no longer be ordered, please order the replacement item |                    |                           |               |               |
| 10   | 90 24 04 605 03 90 | cartridge                 | 1             | 2             |
| 11   | 90 24 04 605 01 90 | cartridge                 | 1             | 2             |