













## TARA Concealed thermostat with one function volume control - Chrome

TARA

36 425 892 Product version from 5/1/2022



- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

|                                                                                     |                                |               |
|-------------------------------------------------------------------------------------|--------------------------------|---------------|
|    | Chrome                         | 36 425 892-00 |
|    | Brushed Platinum               | 36 425 892-06 |
|    | Platinum                       | 36 425 892-08 |
|    | Dark Chrome                    | 36 425 892-19 |
|    | Brushed Durabronze (23kt Gold) | 36 425 892-28 |
|    | Matte Black                    | 36 425 892-33 |
|    | Brushed Dark Brass             | 36 425 892-39 |
|    | Brushed Bronze                 | 36 425 892-42 |
|    | Brushed Champagne (22kt Gold)  | 36 425 892-46 |
|   | Champagne (22kt Gold)          | 36 425 892-47 |
|  | Brushed Chrome                 | 36 425 892-93 |
|  | Brushed Dark Platinum          | 36 425 892-99 |

### Required miscellaneous



**Concealed thermostat -** 35 425 970 90  
 • max. recess depth 136 mm  
 • min. recess depth 80 mm

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

### Required miscellaneous




**Concealed thermostat with built-in isolators -** 35 426 970 90  
 • min. recess depth 80 mm  
 • max. recess depth 136 mm

### Required miscellaneous



**xGRID Installation track 555 mm -** 12 360 970 90

mm [inches]

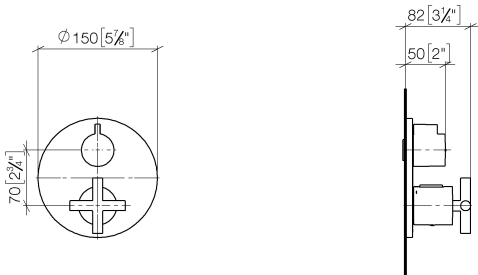

### Flow rate chart



### Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen

VA-Zeichen



TARA Concealed thermostat with one function volume control - Chrome

TARA

36 425 892    Product version from 5/1/2022

Certificates and sustainability

|        |        |        |             |
|--------|--------|--------|-------------|
| LGA_19 | ETA_20 | LGA_19 | WRAS_250402 |
|--------|--------|--------|-------------|



## Spare parts list

| No. | Item Number        | Name       | Quantity used | Delivery time |
|-----|--------------------|------------|---------------|---------------|
| 16  | 09 30 30 157 90    | screw      | 4.00          | 2             |
| 11  | 09 28 10 187 90    | regulator  | 1.00          | 2             |
| 18  | 90 30 01 190 00 90 | disc       | 1.00          | 2             |
| 21  | 09 24 04 257 90    | nut        | 2.00          | 2             |
| 23  | 09 28 10 188 90    | regulator  | 1.00          | 2             |
| 1   | 90 90 03 166 00 90 | top        | 1.00          | 2             |
| 3   | 04 29 06 111 01-00 | spindle    | 1.00          | 10            |
| 13  | 09 12 12 051-00    | base       | 1.00          | 10            |
| 5   | 90 12 12 002 00 90 | fixing cap | 1.00          | 2             |
| 12  | 04 29 06 024 01-00 | spindle    | 1.00          | 10            |
| 17  | 09 30 01 296 90    | disc       | 1.00          | 2             |
| 22  | 90 15 02 013 00 90 | cartridge  | 1.00          | 2             |
| 6   | 09 20 67 006-00    | handle     | 1.00          | 10            |
| 10  | 09 12 12 054 90    | base       | 1.00          | 2             |
| 2   | 09 12 12 053-00    | base       | 1.00          | 10            |
| 24  | 09 28 10 189 90    | regulator  | 1.00          | 2             |
| 7   | 90 17 33 022 00-00 | handle     | 1.00          | 10            |
| 15  | 09 11 02 242-00    | plate      | 1.00          | 10            |
| 14  | 09 31 11 134 90    | pin        | 1.00          | 2             |
| 19  | 90 23 01 124 00 90 | sleeve     | 2.00          | 2             |
| 9   | 90 12 12 052 00 90 | base       | 1.00          | 2             |
| 8   | 90 30 30 124 00 90 | screw      | 1.00          | 2             |
| 4   | 90 23 30 023 00 90 | nut        | 2.00          | 2             |
| 20  | 90 18 40 077 01 90 | spindle    | 2.00          | 2             |