

## WATER POINTS Concealed body spray FlowReduce - Dark Chrome

36 515 979



- HORIZONTAL RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system
- cover plate 120 x 120 mm
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS

**Flow restrictor (8.3 l/min) to extend shower jet from approx. 500 mm to approx. 1000 mm**

Flow restrictor (8.3 l/min) to extend shower jet from approx. 500 mm to approx. 1000 mm

	Dark Chrome	36 515 979-19
	Chrome	36 515 979-00
	Brushed Platinum	36 515 979-06
	Platinum	36 515 979-08
	Light Gold	36 515 979-26
	Brushed Light Gold	36 515 979-27
	Brushed Durabronze (23kt Gold)	36 515 979-28
	Matte Black	36 515 979-33
	Brushed Bronze	36 515 979-42
	Brushed Champagne (22kt Gold)	36 515 979-46
	Champagne (22kt Gold)	36 515 979-47
	Brushed Chrome	36 515 979-93
	Brushed Dark Platinum	36 515 979-99

### Required miscellaneous



**WATER POINTS Adapter plate -** 12 305 970 90  
 • adapter plate for mounting concealed rough parts 35 205 970 90 on the xGRID installation track.

### Required miscellaneous



**Concealed wall installation box -** 35 205 970 90  
 • max. recess depth mm  
 • min. recess depth mm

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

### Required miscellaneous



**xGRID Installation track 555 mm -** 12 360 970 90


**WATER POINTS Concealed body spray FlowReduce - Dark Chrome**

36 515 979


mm [inches]



**Flow rate chart**

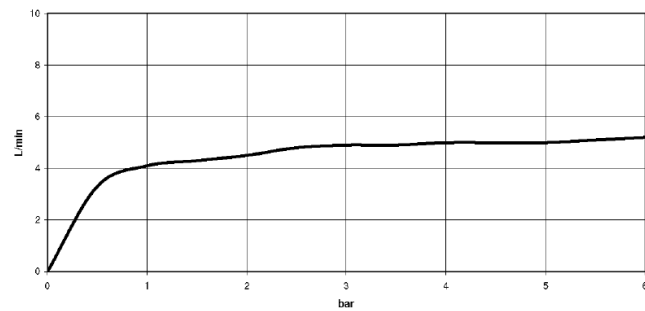

**Trajectory diagram**

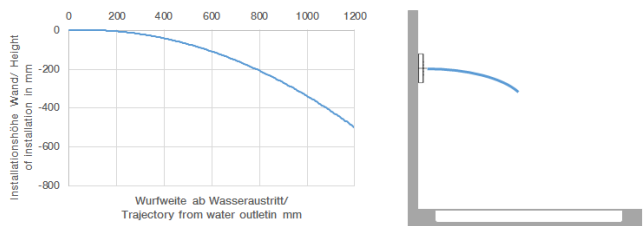

**Codes & Standards**

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
----------------	------	----------	----------

**Ü-Zeichen**



## WATER POINTS Concealed body spray FlowReduce - Dark Chrome

---

36 515 979

### Certificates

---

LGA\_18

IAPMO\_4976 (

## WATER POINTS Concealed body spray FlowReduce - Dark Chrome

36 515 979

