

WATER POINTS Concealed body spray FlowReduce - Dark Chrome

SERIES-VARIOUS

36 515 979



- HORIZONTAL RAIN, max. flow rate 6 l/min (at 3 bar)
- Function from: l/min
- with anti-scale system















Technical data:

- cover plate 120 x 120 mm
- 1/2" connection

Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- **Flow restrictor (8.3 l/min) to extend shower jet from approx. 500 mm to approx. 1000 mm**

Flow restrictor (8.3 l/min) to extend shower jet from approx. 500 mm to approx. 1000 mm

| | | |
|---|--------------------------------|---------------|
|  | Dark Chrome | 36 515 979-19 |
|  | Chrome | 36 515 979-00 |
|  | Brushed Platinum | 36 515 979-06 |
|  | Platinum | 36 515 979-08 |
|  | Light Gold | 36 515 979-26 |
|  | Brushed Light Gold | 36 515 979-27 |
|  | Brushed Durabronze (23kt Gold) | 36 515 979-28 |
|  | Matte Black | 36 515 979-33 |
|  | Brushed Dark Brass | 36 515 979-39 |
|  | Brushed Bronze | 36 515 979-42 |
|  | Brushed Champagne (22kt Gold) | 36 515 979-46 |
|  | Champagne (22kt Gold) | 36 515 979-47 |
|  | Brushed Chrome | 36 515 979-93 |
|  | Brushed Dark Platinum | 36 515 979-99 |

Required miscellaneous



- Concealed wall installation box -** 35 205 970 90
- max. recess depth 110 mm
 - min. recess depth 85 mm

Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

Required miscellaneous



- xGRID Installation track 555 mm -** 12 360 970 90


Required miscellaneous




- WATER POINTS Adapter plate -** 12 305 970 90
- adapter plate for mounting concealed rough parts 35 205 970 90 on the xGRID installation track.

36 515 979


mm [inches]

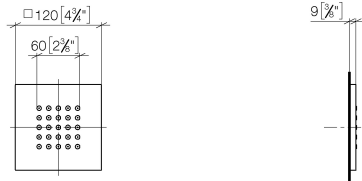

Flow rate chart

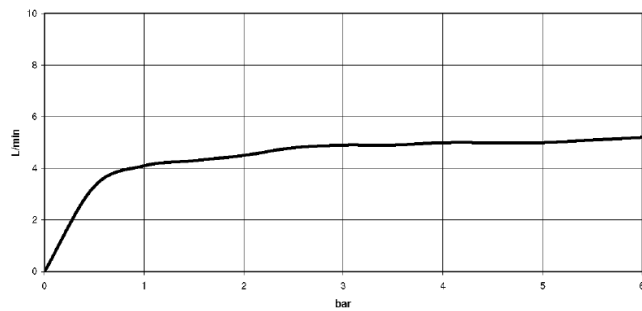

Trajectory diagram

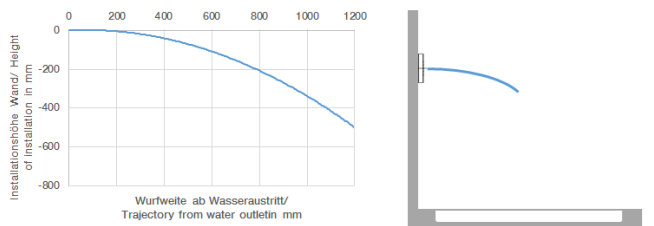

Codes & Standards

ASME A112.18.1

cUPC

DIN 4109

ISO 3822

Ü-Zeichen



WATER POINTS Concealed body spray FlowReduce - Dark Chrome

SERIES-VARIOUS

36 515 979

Certificates and sustainability

LGA_18

IAPMO_4976 (

36 515 979

