

LOT HOT & COLD WATER DISPENSER - Brushed Dark Platinum

LOT

17 861 680 Product version from 4/1/2014 to 5/27/2021



- 145mm projection
- rigid, thermally insulated spout
- laminar flow
- height of mixer 233 mm
- height up to laminar flow regulator 213 mm
- hole diameter 35 mm
- provides filtered, hot water up to 93°C
- provides filtered, cold water
- max. flow 2 l/min at 3 bar flow pressure
- ready-to-use control unit for wall mounting (137mm x 159mm x 60mm)
- electronic magnetic valve
- 100-230 V, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- lead-free

• Spout ring cannot be removed.

• This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.

The installation must be above a kitchen sink.

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.

Detailed planning information and technical data can be found at www.dornbracht.com/professional

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.

The installation must be above a kitchen sink.

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.

Detailed planning information and technical data can be found at www.dornbracht.com/professional

| | | |
|---|--------------------------------|---------------|
|  | Brushed Dark Platinum | 17 861 680-99 |
|  | Chrome | 17 861 680-00 |
|  | Brushed Platinum | 17 861 680-06 |
|  | Platinum | 17 861 680-08 |
|  | Dark Chrome | 17 861 680-19 |
|  | Brushed Durabronze (23kt Gold) | 17 861 680-28 |
|  | Brushed Champagne (22kt Gold) | 17 861 680-46 |
|  | Champagne (22kt Gold) | 17 861 680-47 |

Required miscellaneous




Hot water tank incl. filter -

12 892 970 90

17 861 680 Product version from 4/1/2014 to 5/27/2021

mm [inches]

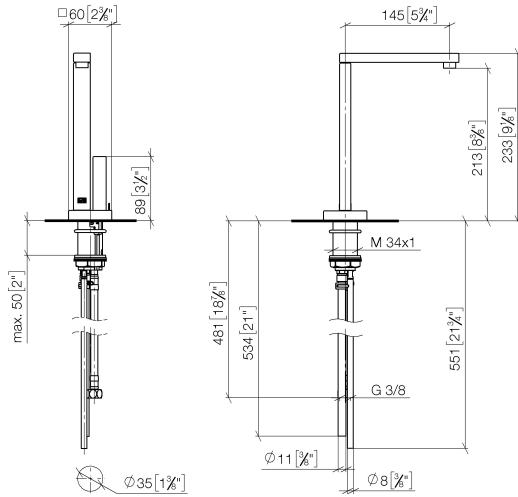

Flow rate chart



Codes & Standards

| | | | |
|----------------|-------|-----------|----------|
| ASME A112.18.1 | cUPC | DIN 4109 | ISO 3822 |
| NSF372 | NSF61 | Ü-Zeichen | |




LOT HOT & COLD WATER DISPENSER - Brushed Dark Platinum

LOT

17 861 680 Product version from 4/1/2014 to 5/27/2021

Certificates and sustainability

| | | | |
|-----------|------------|--------|---------|
| IAPMO_N-4 | IAPMO_4976 | LGA_28 | IAPMO_6 |
|-----------|------------|--------|---------|

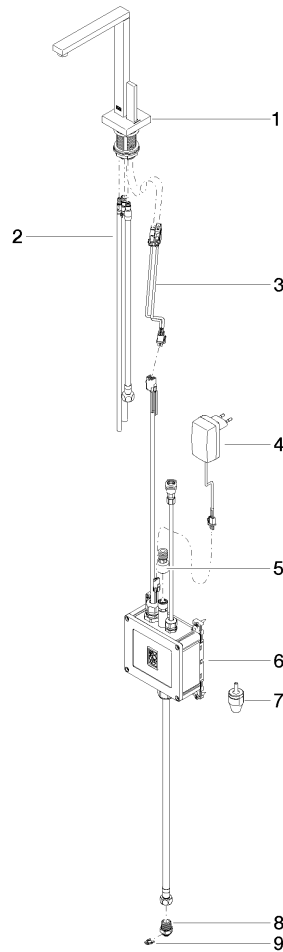

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|-------------------------------------|---------------|---------------|
| 3 | 90 10 01 048 00 90 | electronic accessories | 1.00 | 2 |
| 9 | 09 16 01 045 90 | ring | 1.00 | 2 |
| 4 | 04 10 01 050 00 90 | power supply | 1.00 | 60 |
| 1 | 90 17 85 100 03-99 | fitting | 1.00 | 20 |
| 5 | 12 866 970 90 | Adapter Flow restrictor HCWD 3/8" - | 1.00 | 2 |
| 8 | 09 24 04 293 90 | nipple | 1.00 | 2 |
| 7 | 90 24 04 291 00 90 | insert | 1.00 | 2 |
| 2 | 90 30 04 067 00 90 | hose | 1.00 | 2 |
| 6 | 90 11 11 064 01 90 | electronic accessories | 1.00 | 2 |