



- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- with anti-scale system

**Technical data:**

- rosette for wall elbow Ø 60mm
- rosette for shower holder Ø 60mm
- 1/2" wall elbow

**Notes:**

- WRAS

Intrinsic protection against back flow.


	Brushed Platinum	27 808 809-06 0010
	Chrome	27 808 809-00
	Chrome	27 808 809-00 0010
	Brushed Platinum	27 808 809-06
	Platinum	27 808 809-08 0010
	Platinum	27 808 809-08
	Dark Chrome	27 808 809-19 0010
	Brushed Durabronze (23kt Gold)	27 808 809-28 0010
	Brushed Durabronze (23kt Gold)	27 808 809-28
	Brushed Dark Bronze	27 808 809-39
	Brushed Dark Bronze	27 808 809-39 0010
	Brushed Bronze	27 808 809-42
	Brushed Bronze	27 808 809-42 0010
	Brushed Champagne (22kt Gold)	27 808 809-46 0010
	Champagne (22kt Gold)	27 808 809-47 0010
	Brushed Dark Platinum	27 808 809-99
	Brushed Dark Platinum	27 808 809-99 0010

Recommended miscellaneous

- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
  - min. recess depth 90 mm



mm [inches]

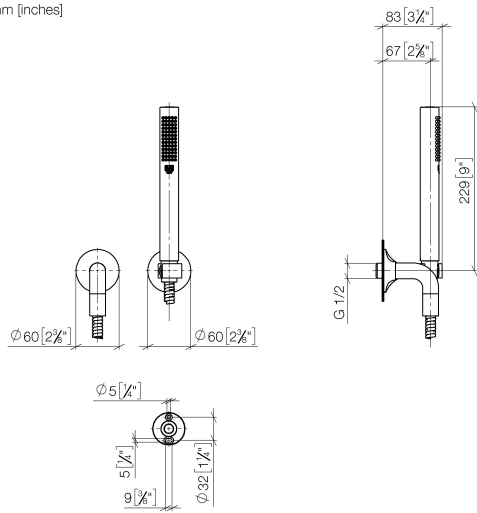


## Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
----------------	------	----------	----------

## Ü-Zeichen

## Certificates and sustainability

LGA_29	IAPMO_4976
--------	------------

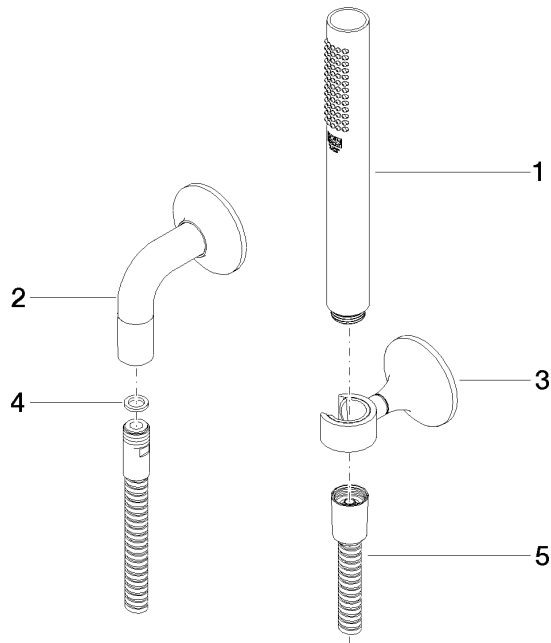

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
3	28 050 809-06	VAIA Wall bracket - Brushed Platinum	1.00	10
2	28 450 809-06	VAIA Wall elbow - Brushed Platinum	1.00	10
5	90 30 02 072 00-06	Metal shower hose 1/2" x 3/8" x 1250 mm - Brushed Platinum	1.00	10
4	90 14 20 026 00 90	seal	1.00	2
1	90 12 11 140 41-06	shower	1.00	10