

36 503 985 Product version from 9/1/2022



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

Fits: IMO, MEM, CL.1, CYO

	Brushed Light Gold	36 503 985-27
	Chrome	36 503 985-00
	Brushed Platinum	36 503 985-06
	Platinum	36 503 985-08
	Dark Chrome	36 503 985-19
	Brushed Durabronze (23kt Gold)	36 503 985-28
	Matte Black	36 503 985-33
	Brushed Champagne (22kt Gold)	36 503 985-46
	Champagne (22kt Gold)	36 503 985-47
	Brushed Chrome	36 503 985-93
	Brushed Dark Platinum	36 503 985-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control - 35 503 970 90
 •min. recess depth mm
 •max. recess depth mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90


Required miscellaneous




xGRID Installation track 555 mm - 12 360 970 90

36 503 985 Product version from 9/1/2022

mm [inches]

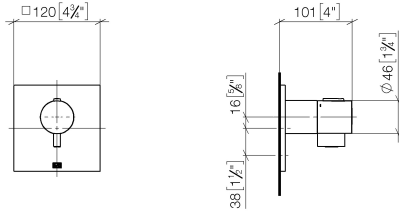

Flow rate chart

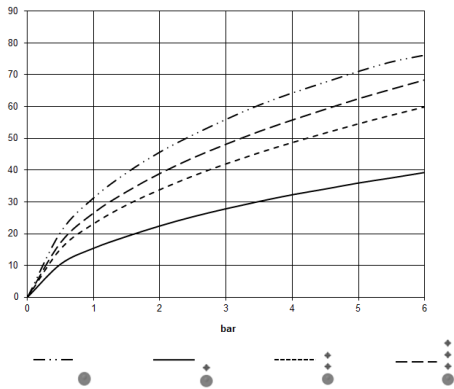

Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold

IMO


36 503 985 Product version from 9/1/2022

Certificates

WRAS_2011

DVGW_DW-
6512DN0

LGA_29

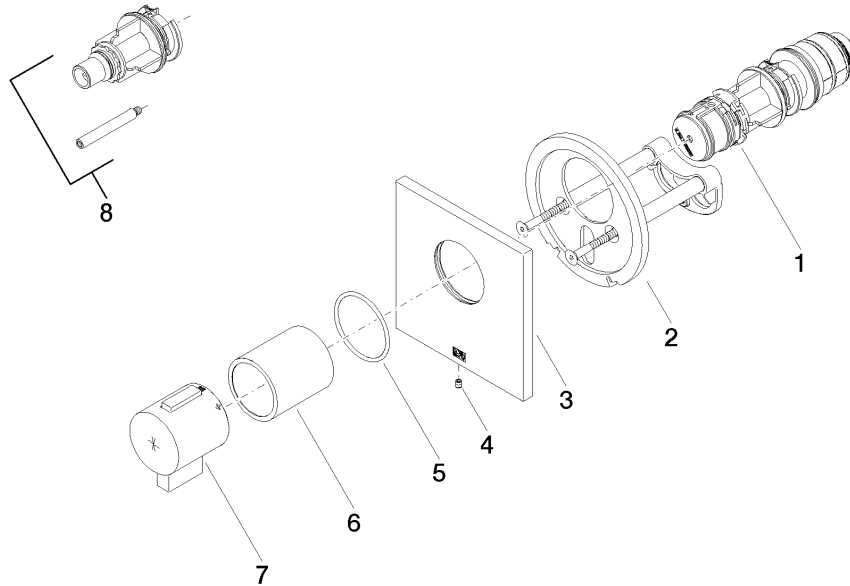

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 02 063 00 90	cartridge	1	2
2	90 11 01 196 00 90	base	1	2
3	90 11 02 533 00-27	cover	1	30
4	09 31 11 044 90	pin	1	2
5	90 14 10 049 00 90	seal	1	2
6	90 21 02 112 00-27	sleeve	1	30
7	90 17 33 025 00-27	handle	1	30
8	12 178 970 90	Extension 46 mm -	1	2