

36 200 980



- Inversor giratorio
- Roseta 60 x 60 mm

| | | |
|--|-------------------------------|---------------|
|  | cromo cepillado | 36 200 980-93 |
|  | Cromo | 36 200 980-00 |
|  | Platino cepillado | 36 200 980-06 |
|  | Dark Chrome | 36 200 980-19 |
|  | Light Gold cepillado | 36 200 980-27 |
|  | Latón cepillado (Oro 23k) | 36 200 980-28 |
|  | Negro mate | 36 200 980-33 |
|  | Champagne cepillado (Oro 22k) | 36 200 980-46 |
|  | Champagne (Oro 22k) | 36 200 980-47 |
|  | Dark Platinum cepillado | 36 200 980-99 |

36 200 980

mm [inches]





Diagrama de flujo

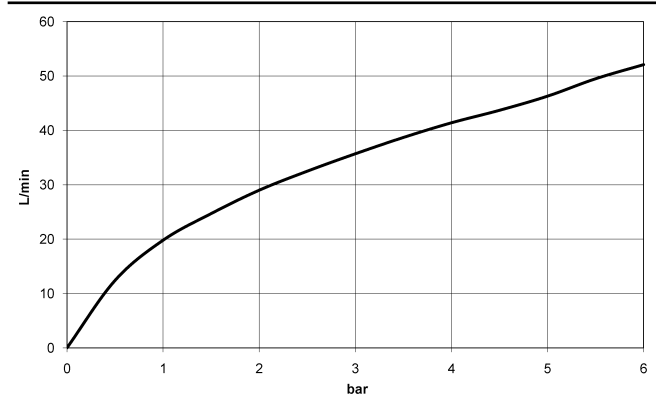

Códigos y Estándares

| | | | |
|----------|----------|------------------------|-----------------------------|
| DIN 4109 | ISO 3822 | Scottish Water Byelaws | UK Water Supply Regulations |
|----------|----------|------------------------|-----------------------------|

Ü-Zeichen



SYMETRICS Inversor empotrado de dos vías - cromo cepillado

SYMETRICS

36 200 980

Certificados y sostenibilidad

LGA_38

WRAS_2307

36 200 980

Piezas para otros
acabados pueden
encontrarse aquí:
Cromo

