

## SERIES SPECIFIC Hand shower set FlowReduce - Dark Chrome

## SERIES SPECIFIC

27 806 625




- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system
- rosette Ø 55 mm
- metal shower hose 1250mm with integrated anti-twist protection
- shower holder rosette Ø 55mm
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.


	Dark Chrome	27 806 625-19 0010
	Chrome	27 806 625-00
	Chrome	27 806 625-00 0010
	Brushed Platinum	27 806 625-06
	Brushed Platinum	27 806 625-06 0010
	Dark Chrome	27 806 625-19
	Light Gold	27 806 625-26 0010
	Light Gold	27 806 625-26
	Brushed Light Gold	27 806 625-27 0010
	Brushed Light Gold	27 806 625-27
	Brushed Durabass (23kt Gold)	27 806 625-28
	Brushed Durabass (23kt Gold)	27 806 625-28 0010
	Matte Black	27 806 625-33 0010
	Matte Black	27 806 625-33
	Brushed Dark Brass	27 806 625-39 0010
	Brushed Dark Brass	27 806 625-39
	Brushed Bronze	27 806 625-42
	Brushed Bronze	27 806 625-42 0010
	Brushed Champagne (22kt Gold)	27 806 625-46
	Brushed Champagne (22kt Gold)	27 806 625-46 0010
	Champagne (22kt Gold)	27 806 625-47
	Champagne (22kt Gold)	27 806 625-47 0010
	Brushed Chrome	27 806 625-93
	Brushed Chrome	27 806 625-93 0010
	Brushed Dark Platinum	27 806 625-99
	Brushed Dark Platinum	27 806 625-99 0010

27 806 625


Recommended miscellaneous

	<b>Concealed wall elbow -</b> •max. recess depth 163 mm •min. recess depth 90 mm	35 085 970 90
---	--	---------------

Recommended miscellaneous

	<b>Wall elbow - Dark Chrome</b>	28 450 625-19
---	---------------------------------	---------------

27 806 625

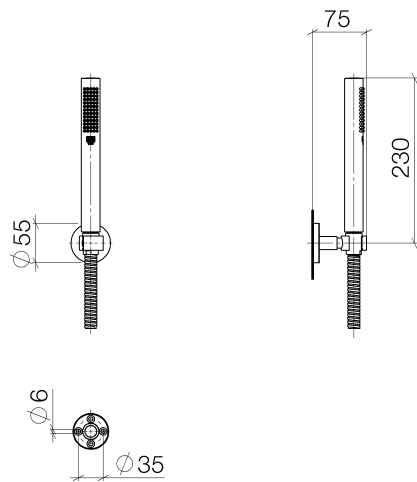

**Codes & Standards**

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
----------------	------	----------	----------

**Ü-Zeichen**

**Certificates and sustainability**

LGA_29	IAPMO_4976
--------	------------

27 806 625

