


Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Durabronz (23kt Gold)

IMO

28 044 980

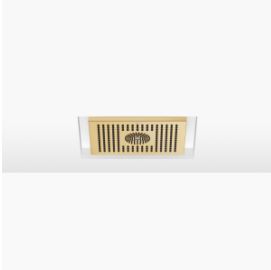

Fits: IMO, LULU, MEM, CL.1, CYO

- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- min. recess depth 137 mm
- with anti-scale system
- central RGBW LED spot
- RGBW LED ambient lighting
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Provided by customer: Zigbee gateway
- Not suitable for use in a steam room.
- WRAS 240502006

includes light bulbs with a Class G energy efficiency

includes light bulbs with a Class G energy efficiency

| | | |
|--|-------------------------------|---------------|
| | Brushed Durabronz (23kt Gold) | 28 044 980-28 |
| | Chrome | 28 044 980-00 |
| | Brushed Platinum | 28 044 980-06 |
| | Platinum | 28 044 980-08 |
| | Dark Chrome | 28 044 980-19 |
| | Brushed Light Gold | 28 044 980-27 |
| | Matte Black | 28 044 980-33 |
| | Brushed Champagne (22kt Gold) | 28 044 980-46 |
| | Champagne (22kt Gold) | 28 044 980-47 |
| | Brushed Chrome | 28 044 980-93 |
| | Brushed Dark Platinum | 28 044 980-99 |

Required miscellaneous



Concealed ceiling installation box for recessed ceiling installation with light -

35 044 970 90


- flush-mounted installation box 360x 300 mm RAL 9003 signal white
- recess depth 137mm
- Supply pipe 7 m
- concealed rough parts
- Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class II
- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Durabronz (23kt Gold)


IMO

28 044 980

mm [inches]

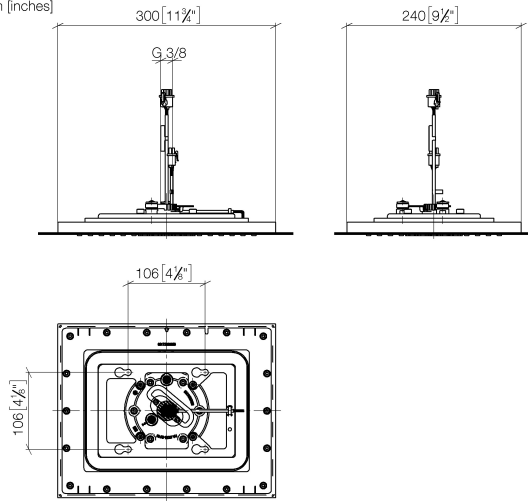

Flow rate chart

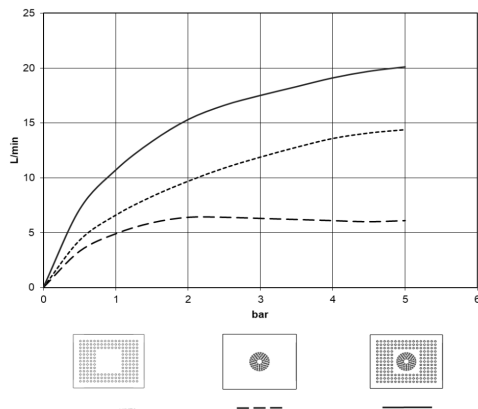

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed
Durabron (23kt Gold)

IMO

28 044 980

Certificates

LGA_38


WRAS_240502

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed
Durabronz (23kt Gold)

IMO

28 044 980

Product version from 5/1/2022

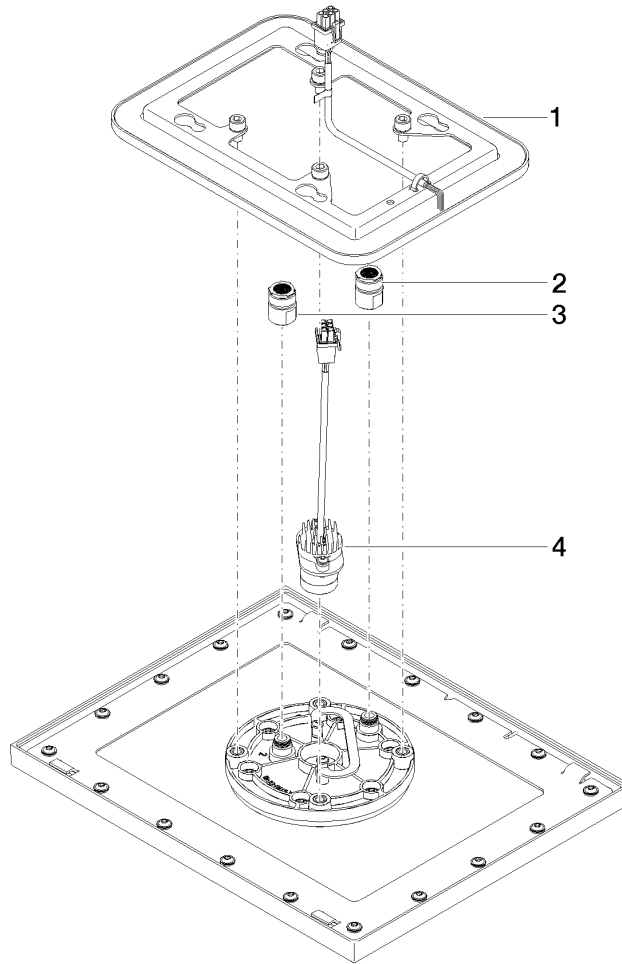



Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed
Durabrass (23kt Gold)

IMO

28 044 980

Spare parts list

Product version from 5/1/2022

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| | 90 10 01 224 00 90 | electronic accessories | 4 | 2 |