





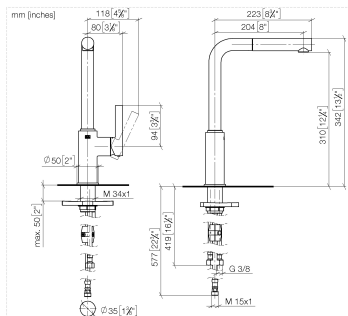
33 950 210




- 204mm projection
 - pivotable spout 360°
 - air-enriched flow
 - max. flow 8 l/min at 3 bar flow pressure
 - fabric braided hose 1500 mm
- Intrinsic protection against back flow.

	Chrome	33 950 210-00
	Soft Black	33 950 210-69
	Brushed Nickel	33 950 210-70

33 950 210



Flow rate chart

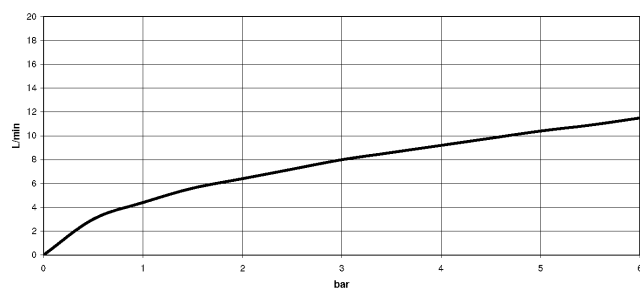

Codes & Standards

DIN 4109	EN 1717	EN 817	ISO 3822
----------	---------	--------	----------

Ü-Zeichen	XP P 41-280
-----------	-------------



DORNBRAUCH PIUR Single-lever mixer Pull-out - Chrome

DORNBRAUCH
PIUR


33 950 210

Certificates and sustainability

Belgaqua_23-012-2	ACS_23 ACC NY	AbP_10	DVGW_DW-6506DO0
-------------------	---------------	--------	-----------------

33 950 210

Parts for other
finishes can be found
here: [Soft Black](#)

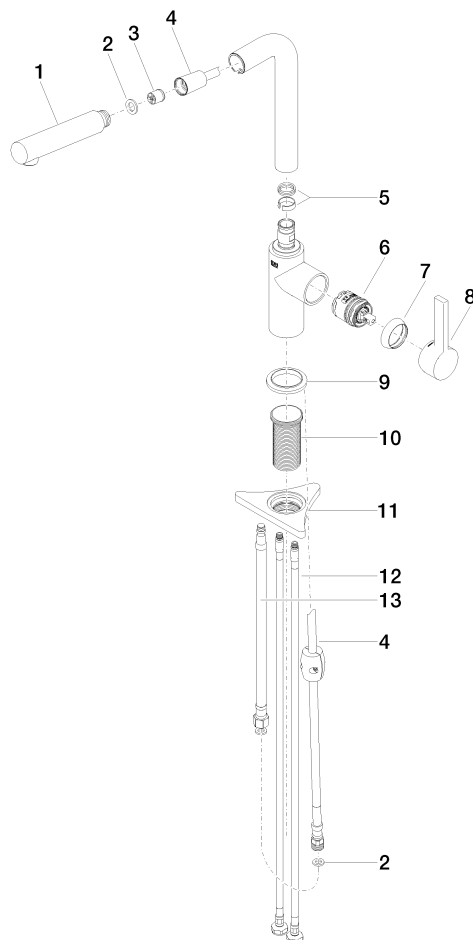

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	13 90 30 04 110 00 90	hose	1.00	2
	10 90 30 01 200 00 90	shaft	1.00	2
	3 90 23 01 051 00 90	flow reducer	1.00	2
	1 90 12 11 180 00-00	shower	1.00	2
	2 90 14 05 081 00 90	seal	1.00	2
	9 90 27 21 001 00-00	rosette	1.00	2
	12 04 30 04 101 00 90	hose	2.00	2
	4 90 30 02 101 00 90	hose	1.00	2
	8 90 20 21 001 00-00	handle	1.00	2
	7 90 28 30 011 00-00	cover	1.00	2
	11 90 23 10 003 00 90	fixing set	1.00	2
	6 90 15 05 060 00 90	cartridge	1.00	2
	5 90 14 15 060 00 90	gasket kit	1.00	2