



xTOOL Concealed thermostat module with 3 valves -

35 531 970 90



- red brass, lead-free
- 2x back flow preventer
- 2x female thread 3/4" connections
- 1x female thread 3/4" outlet for additional valves
- 3x female thread 3/4" outlet, right/left alternatively
- 4x dust cover
- 4x anti-water packing
- soundproofing
- gauge 120 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)
- WRAS 2011026

Recommended miscellaneous

Extension 28 mm -

12 177 970 90



Recommended miscellaneous

Extension 46 mm -

12 178 970 90




Required miscellaneous




**Drybox Thermostat module with 3 valves -** 39 531 970 90

## xTOOL Concealed thermostat module with 3 valves -

35 531 970 90

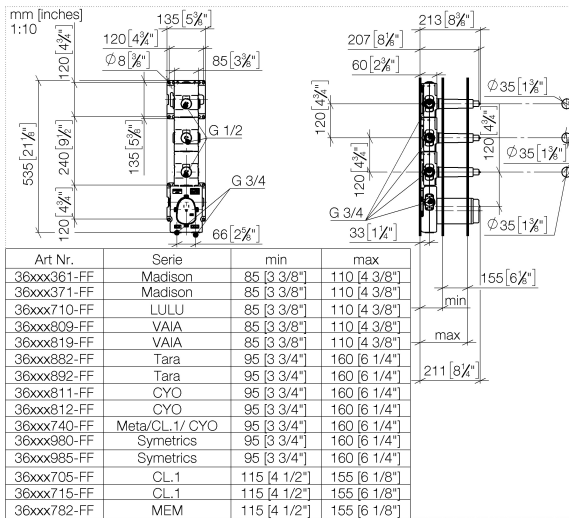

### Flow rate chart

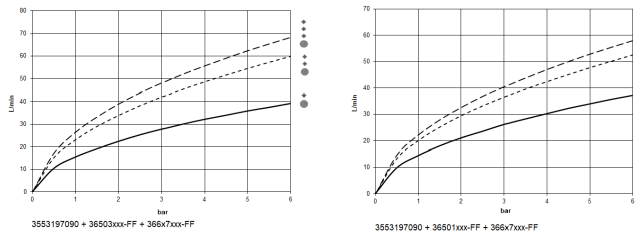

### Codes & Standards

EN 1111

EN 1717

Scottish Water  
Byelaws

UK Water Supply  
Regulations

XP P 41-280



## xTOOL Concealed thermostat module with 3 valves -

---

35 531 970 90

### Certificates

---

ACS\_21 ACC LY

Belgaqua\_21-031-2 DVGW\_DW-  
6512DN0


WRAS\_2011

## xTOOL Concealed thermostat module with 3 valves -

35 531 970 90

Product version up to 11/25/2021

**Product version from 1/1/2022**

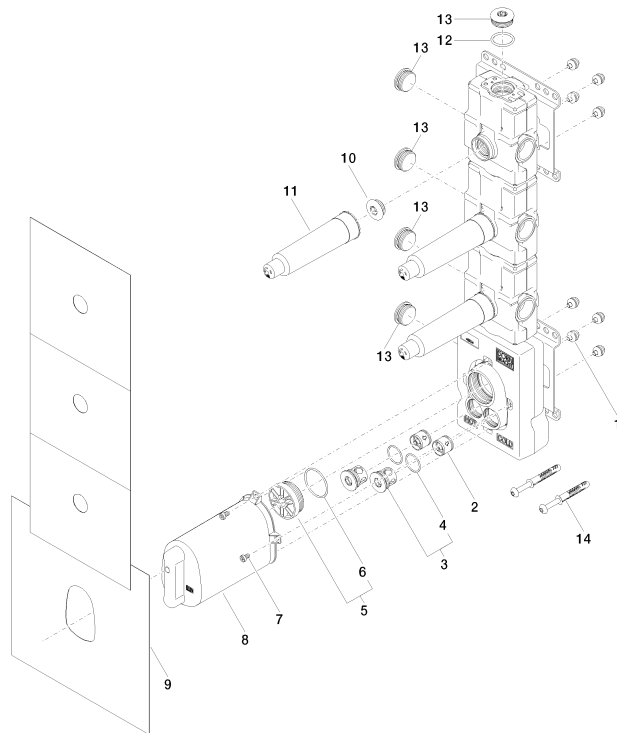



## xTOOL Concealed thermostat module with 3 valves -

---

35 531 970 90

### Spare parts list

Product version up to 11/25/2021

#### **Product version from 1/1/2022**

No.	Item Number	Name	Quantity used	Delivery time
	90 23 01 091 00 90	set	36	2