

28 450 845



- 3/8" shower outlet
- rosette 60 x 78 mm
- 1/2" connection
- WRAS

Intrinsic protection against back flow.

| | | |
|---|-----------------------|---------------|
|  | Brushed Bronze | 28 450 845-42 |
|  | Chrome | 28 450 845-00 |
|  | Brushed Platinum | 28 450 845-06 |
|  | Dark Chrome | 28 450 845-19 |
|  | Light Gold | 28 450 845-26 |
|  | Brushed Light Gold | 28 450 845-27 |
|  | Matte Black | 28 450 845-33 |
|  | Brushed Chrome | 28 450 845-93 |
|  | Brushed Dark Platinum | 28 450 845-99 |

Recommended miscellaneous



- Concealed wall elbow -

 - min. recess depth 90 mm
 - max. recess depth 163 mm


35 085 970 90

28 450 845

mm [inches]



Flow rate chart

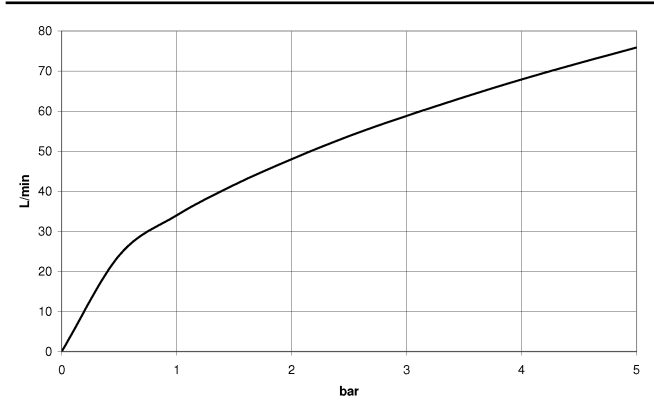

Codes & Standards

| | | | |
|----------------|------|---------------------------|--------------------------------|
| ASME A112.18.1 | cUPC | Scottish Water Byelaws | UK Water Supply Regulations |
|----------------|------|---------------------------|--------------------------------|



LISSE Wall elbow - Brushed Bronze

LISSE

28 450 845

Certificates and sustainability

WRAS_2310

IAPMO_4976

28 450 845

