





28 508 710



- 200mm projection
- ball-joint pivotable through 30°
- Three settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate 9 l/min (at 3 bar)
- with anti-scale system
- spray head Ø 92mm
- rosette 78 x 55 mm
- 1/2" connection
- Function from: 7 l/min

	Chrome	28 508 710-00
	Chrome	28 508 710-00 0010
	Brushed Platinum	28 508 710-06 0010
	Brushed Platinum	28 508 710-06


Recommended miscellaneous




- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
 - min. recess depth 90 mm

28 508 710


mm [inches]

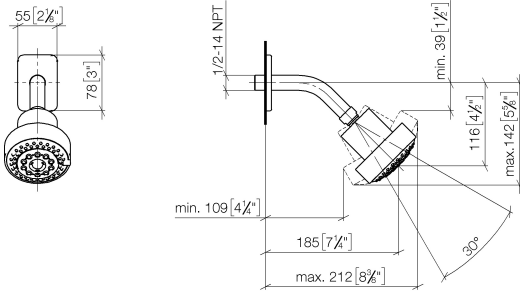

Flow rate chart

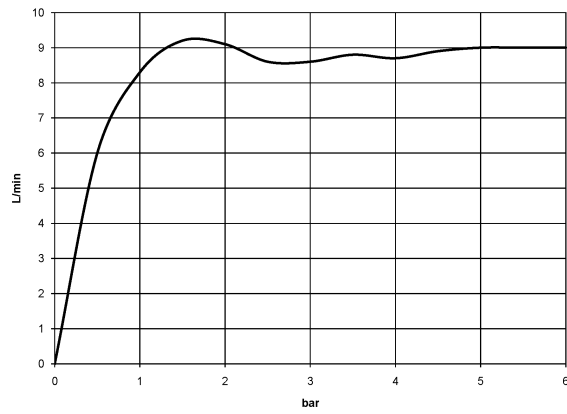

28 508 710

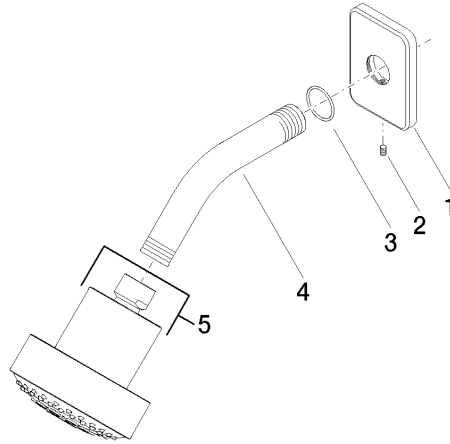

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	09 11 03 011-00	connection	1.00	10
5	04 12 11 110 00-00	shower	1.00	10
2	09 31 11 048 90	pin	1.00	2
1	09 27 71 004-00	rosette	1.00	10
3	09 14 10 098 90	seal	1.00	2