

MADISON Rain shower with ceiling fixing 200 mm - Platinum

MADISON








28 565 977    Product version up to 12/5/2019




- rain shower Ø 200 mm
- PURE RAIN, max. flow rate 14 l/min (at 3 bar)
- Function from: 8 l/min
- with anti-scale system

Technical data:

- distance between ceiling and lower edge of the shower 185mm
- rosette Ø 55 mm
- 1/2" connection


	Platinum	28 565 977-08
	Chrome	28 565 977-00
	Brushed Platinum	28 565 977-06
	Durabrand (23kt Gold)	28 565 977-09
	Brushed Durabrand (23kt Gold)	28 565 977-28
	Brushed Dark Brass	28 565 977-39
	Brushed Dark Platinum	28 565 977-99

Recommended miscellaneous


	<div>Concealed wall elbow -</div> <div> <ul style="list-style-type: none"> <li>•max. recess depth 163 mm</li> <li>•min. recess depth 90 mm</li> </ul> </div>	35 085 970 90
---	--	---------------

28 565 977 Product version up to 12/5/2019

mm [inches]

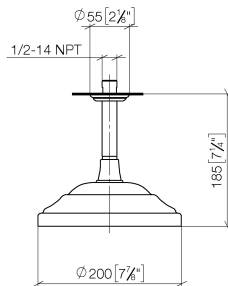

### Flow rate chart

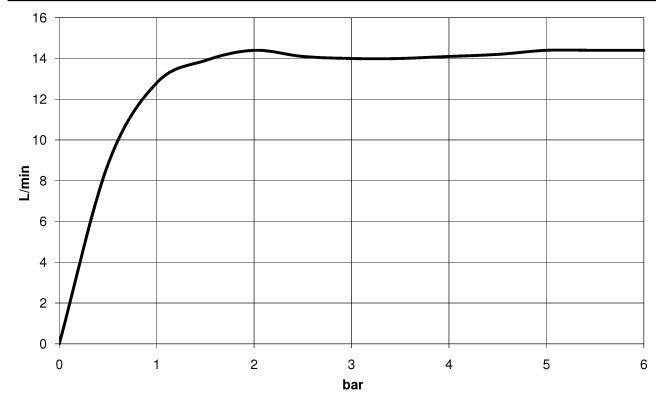

### Codes & Standards

DIN 4109	EN 1112	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



## MADISON Rain shower with ceiling fixing 200 mm - Platinum

MADISON


28 565 977 Product version up to 12/5/2019

### Certificates and sustainability

DVGW\_DW-  
6517DN0

LGA\_38

WRAS\_250102

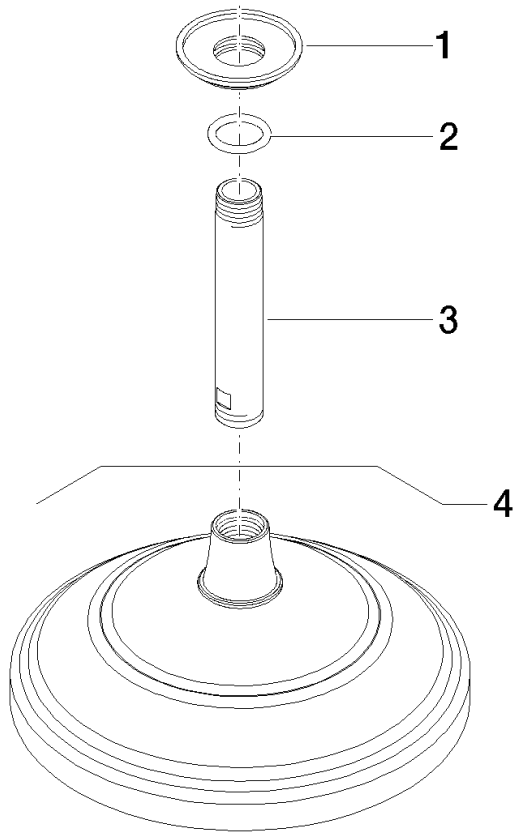

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
3	09 11 03 018-08	connection	1.00	40
1	09 27 35 003-08	rosette	1.00	40
2	90 14 10 026 00 90	seal	2.00	2