

Concealed wall mounting -

35 003 970 90 Product version from 10/2/2019



- red brass, lead-free
- 2x female thread 1/2" connections
- dust cover
- anti-water packing
- soundproofing
- WRAS

Can only be combined with exposed trim parts 26
024 661-FF / 36 013 660-FF / 36 045 660-FF / 36
013 970-FF / 36 045 970-FF / 36 804 661-FF.

Recommended miscellaneous



Extension 25 mm -

- Can only be combined with exposed trim parts 36 804 661-FF.

12 179 970 90

Required miscellaneous



Drybox Concealed thermostat -


- Overflow is part of the scope of delivery.

XS-08 3952


Concealed wall mounting -

35 003 970 90 Product version from 10/2/2019

mm [inches]

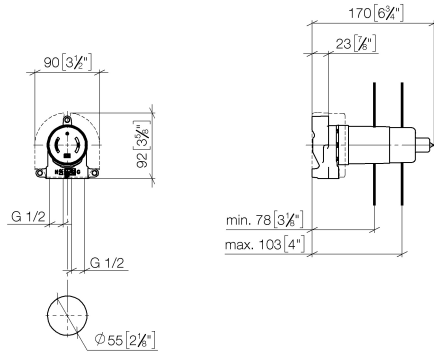

Flow rate chart

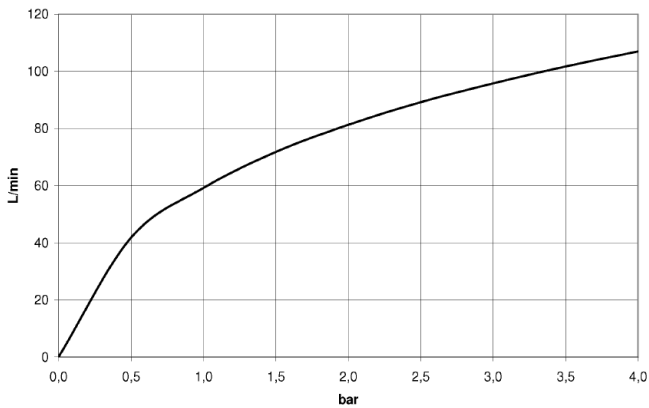

Codes & Standards

DIN 4109

EN 817

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Concealed wall mounting -

35 003 970 90 Product version from 10/2/2019

Certificates

DVGW_DW-
6512DN0


LGA_18

WRAS_2003

WRAS_2101

Concealed wall mounting -

35 003 970 90 Product version from 10/2/2019

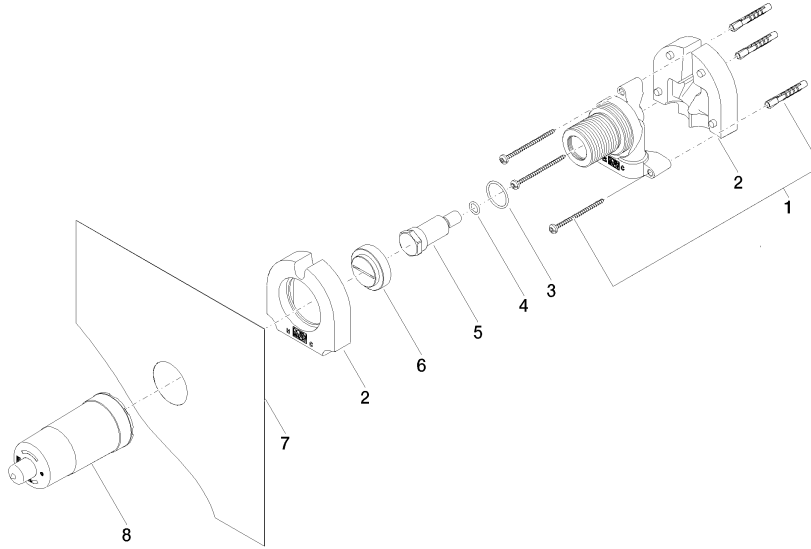

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	05 30 31 029 00 90	fixing set	1	2
2	09 11 11 019 90	accessories	2	2
3	09 14 10 112 90	seal	1	2
4	09 14 10 139 90	seal	1	2
5	09 31 20 038 90	plug	1	2
6	09 20 97 010 90	cap	1	2
7	04 14 03 079 00 90	gasket kit	1	2
8	09 21 02 178 90	cap	1	2