

Concealed thermostat -

35 424 970 90



- lead-free, dezincification resistant
- 2x back flow preventer
- 2x supply connection 1/2" female thread (cold/hot), DN 15
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- suitable for xGRID (when using installation track + 12 mm recess depth)
- gauge 70 mm
- 3x female thread 1/2" outlet
- WRAS 1906098



Concealed thermostat -

35 424 970 90

Codes & Standards

Scottish Water
Byelaws

UK Water Supply
Regulations


Certificates

WRAS_1906

Concealed thermostat -

35 424 970 90

Product version from 1/1/2023

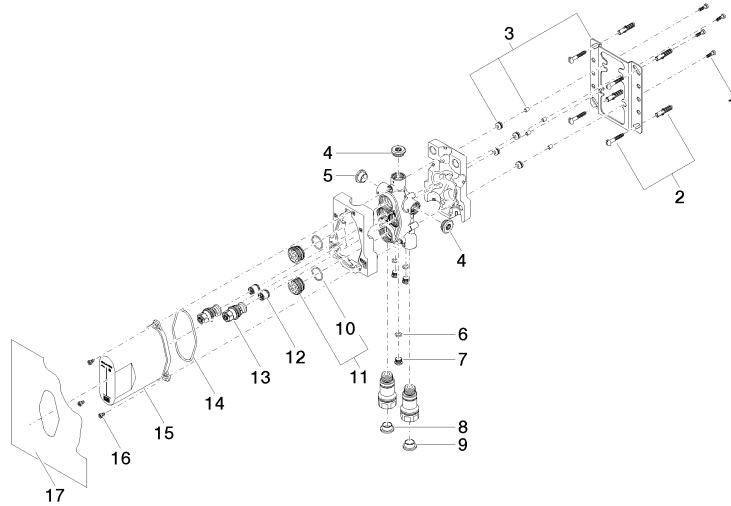



Concealed thermostat -

35 424 970 90

Spare parts list

Product version from 1/1/2023

No.	Item Number	Name	Quantity used	Delivery time
	09 30 30 171 90	screw	32	2