









36 425 845 Product version from 6/30/2022




- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

	Matte Black	36 425 845-33
	Chrome	36 425 845-00
	Brushed Platinum	36 425 845-06
	Dark Chrome	36 425 845-19
	Brushed Light Gold	36 425 845-27
	Brushed Chrome	36 425 845-93
	Brushed Dark Platinum	36 425 845-99


Required miscellaneous

	<div> <div>Concealed thermostat -</div> <div> <div>•max. recess depth 136 mm</div> <div>•min. recess depth 80 mm</div> </div> </div>	35 425 970 90
---	--	---------------


Required miscellaneous

	<div> <div>Concealed thermostat with built-in isolators -</div> <div> <div>•max. recess depth 136 mm</div> <div>•min. recess depth 80 mm</div> </div> </div>	35 426 970 90
---	--	---------------

mm [inches]

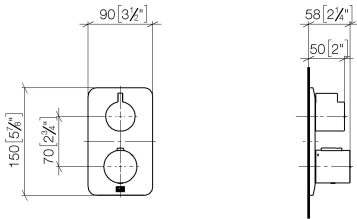

Flow rate chart

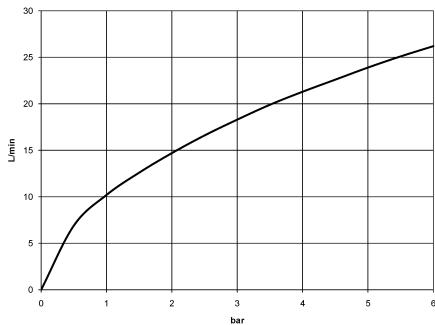

Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen	VA-Zeichen	



LISSE Concealed thermostat with one function volume control - Matte Black

LISSE

36 425 845 Product version from 6/30/2022

Certificates and sustainability

LGA_19	ETA_20	DVGW_DW-6512DN0	LGA_19	WRAS_250402
--------	--------	-----------------	--------	-------------

