







36 503 977



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS 2011026

	Platinum	36 503 977-08
	Chrome	36 503 977-00
	Brushed Platinum	36 503 977-06
	Durabress (23kt Gold)	36 503 977-09
	Brushed Durabress (23kt Gold)	36 503 977-28
	Brushed Dark Platinum	36 503 977-99


Required miscellaneous




- xTOOL Concealed thermostat module without volume control -** 35 503 970 90
- max. recess depth 110 mm
 - min. recess depth 85 mm

36 503 977

mm [inches]

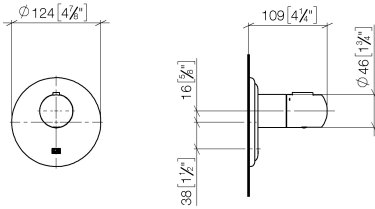

Flow rate chart

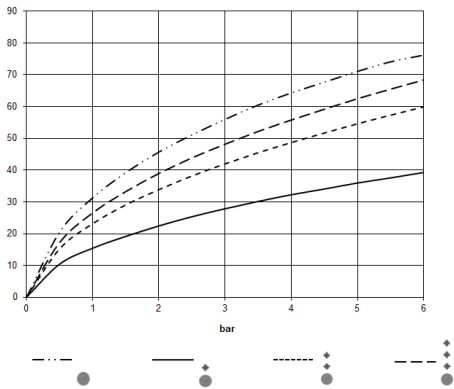

Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



MADISON xTOOL Concealed thermostat without volume control 3/4" - Platinum

MADISON

36 503 977

Certificates

LGA_29

LGA_29

DVGW_DW-
6512DN0

WRAS_2011


36 503 977

Product version up to 2/2/2021

Product version from 5/11/2021 to 11/25/2021

Product version from 1/1/2022

Product version from 6/30/2022 to 5/11/2021

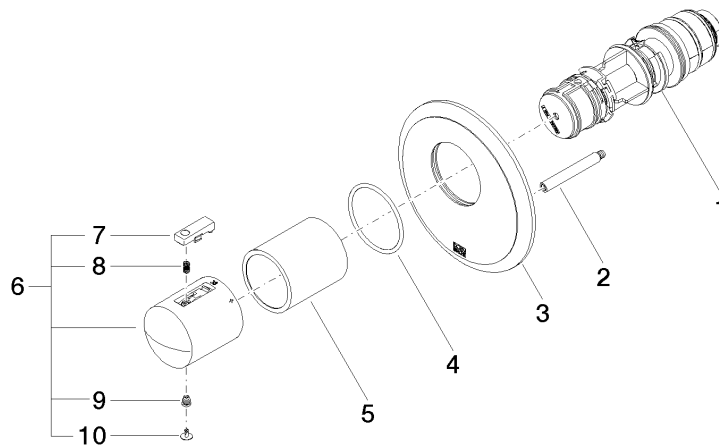



MADISON xTOOL Concealed thermostat without volume control 3/4" - Platinum

MADISON

36 503 977

Spare parts list

Product version up to 2/2/2021

Product version from 5/11/2021 to 11/25/2021

Product version from 1/1/2022

Product version from 6/30/2022 to 5/11/2021

No.	Item Number	Name	Quantity used	Delivery time
	90 15 02 063 00 90	cartridge	10	2