



- automatic hygiene flush
  - suitable for thermal disinfection
  - adjustable follow-up time
  - high-frequency sensors with self-calibration
  - magnetic valve
  - 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone).
    Cannot be combined with basins that have a closing drain.
    ATTENTION: Separate terms and conditions for electronic articles are applicable.

#### Individual components of this set

You need the following components for this set

42 766 970 90




1x 13 800 740-00



ST 010 203 0740



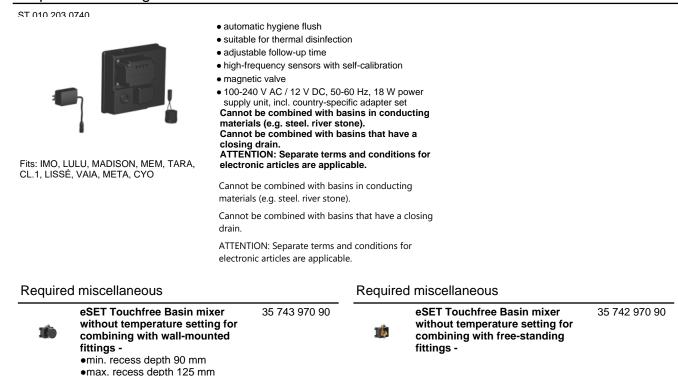



Recommended miscellaneous

Extension for Touchfree 500 mm - 12 765 970 90



ST 010 203 0740 mm [inches]






| Certificates |               |            |   |   |
|--------------|---------------|------------|---|---|
| LGA_29120.   | WRAS_1906116. | IAPMO_EGS. | CE000001_eSet_Tou<br>chfree_20171206_D<br>E_signed. | CE000002_eSet_Tou<br>chfree_20171206_E<br>N_signed. |

LGA\_29119.



ST 010 203 0740

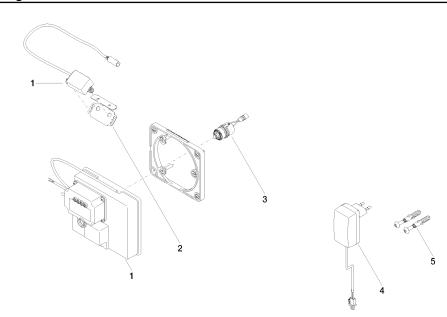

### Spare parts list

| No. | Item Number        | Name                   | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1   | 90 10 01 177 00 90 | electronic accessories | 1             | 2             |
| 2   | 90 17 20 199 00 90 | holder                 | 1             | 2             |
| 3   | 04 30 50 079 00 90 | valve                  | 1             | 2             |
| 4   | 04 10 01 050 00 90 | power supply           | 1             | 60            |
| 5   | 04 30 31 024 01 90 | fixing set             | 1             | 2             |



#### ST 010 203 0740



- 125mm projection
- fixed spout
- rectangular, air-enriched flow
- hole diameter 37 mm
- 1/2" connection
- plug-link mounting
- max. flow 5 l/min
- lead-free

The mounting height from the top edge of the basin to the centre of the connection should be at least 125 mm. The front edge of the spout should be at least 20 mm in front of the back edge of the sink.

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment

#### Recommended miscellaneous

#### Concealed wall elbow -

- max. recess depth 163 mm
- •min. recess depth 90 mm

35 085 970 90




ST 010 203 0740



ST 010 203 0740 mm [inches]




#### Flow rate chart






ST 010 203 0740

#### Trajectory diagram





ST 010 203 0740

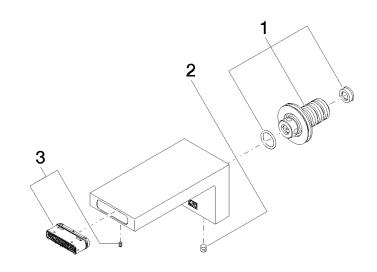

### Spare parts list

| No. | Item Number        | Name       | Quantity used | Delivery time |
|-----|--------------------|------------|---------------|---------------|
| 1   | 90 24 03 108 00 90 | nipple set | 1             | 2             |
| 2   | 90 31 11 004 00 90 | pin        | 1             | 2             |
| 3   | 90 29 03 067 00 90 | aerator    | 1             | 2             |