

36 210 740



- inverseur rotatif
- sans rosace
- poignée Ø 60 mm

S'adapte aux gammes suivantes : CL.1, META, CYO

	Laiton brossé (Or 23cts)	36 210 740-28
	Chrome	36 210 740-00
	Platine brossé	36 210 740-06
	Or clair	36 210 740-26
	Or clair brossé	36 210 740-27
	Noir mat	36 210 740-33
	Bronze brossé	36 210 740-42
	Champagne brossé (Or 22cts)	36 210 740-46
	Champagne (Or 22cts)	36 210 740-47
	Dark Platinum brossé	36 210 740-99

Accessoires requis



- Inverseur à 3 voies à encastrer - 35 203 970 90**
- profondeur de montage max. 160 mm
 - profondeur de montage mini. 85 mm

36 210 740

mm [inches]


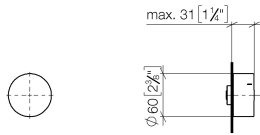


Diagramme de débit

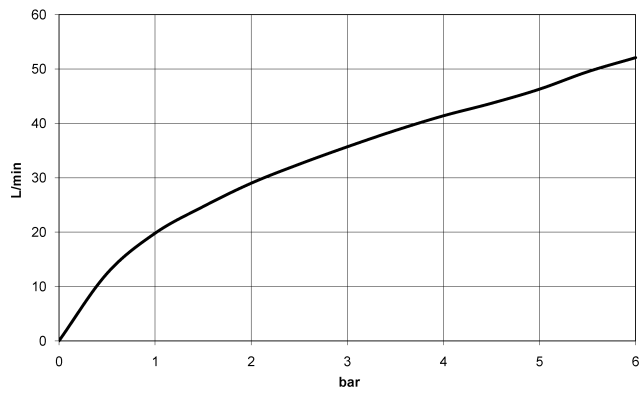

Certificats

LGA_38380.

WRAS_2307045.

36 210 740

