

## Rain shower for recessed ceiling installation with light 300 mm - Matte Black

SERIES SPECIFIC

28 034 970 Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

### Technical data:

- min. recess depth 137 mm

### Ceiling module power supply

- 12V DC (CV)

### electrical:

### Ambient lighting

### Spot lighting

- LED coloured light RGBW
- LED coloured light RGBW















### Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway
- Bulbs protected against splashing water

### Environment

### Planning tips:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

|   |                               |               |
|---|-------------------------------|---------------|
|    | Matte Black                   | 28 034 970-33 |
|    | Chrome                        | 28 034 970-00 |
|    | Brushed Platinum              | 28 034 970-06 |
|    | Platinum                      | 28 034 970-08 |
|    | Dark Chrome                   | 28 034 970-19 |
|    | Light Gold                    | 28 034 970-26 |
|    | Brushed Light Gold            | 28 034 970-27 |
|    | Brushed Durabrass (23kt Gold) | 28 034 970-28 |
|    | Brushed Dark Brass            | 28 034 970-39 |
|    | Brushed Bronze                | 28 034 970-42 |
|   | Brushed Champagne (22kt Gold) | 28 034 970-46 |
|  | Champagne (22kt Gold)         | 28 034 970-47 |
|  | Brushed Chrome                | 28 034 970-93 |
|  | Brushed Dark Platinum         | 28 034 970-99 |


## Required miscellaneous



### Concealed ceiling installation box for recessed ceiling installation with light - 35 034 970 90

- flush-mounted reflection box Ø 360 mm RAL 9003 signal white
- recess depth 137mm
- 2x female thread 1/2" outlet
- concealed rough parts
- Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class 2
- ZigBee Light Link RGBW controller

mm [inches]

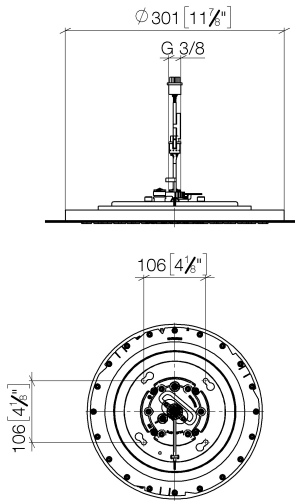

### Flow rate chart



### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

### Ü-Zeichen



## Rain shower for recessed ceiling installation with light 300 mm - Matte Black


SERIES SPECIFIC

28 034 970 Product version from 5/1/2022

Certificates and sustainability

LGA\_38

WRAS\_240502

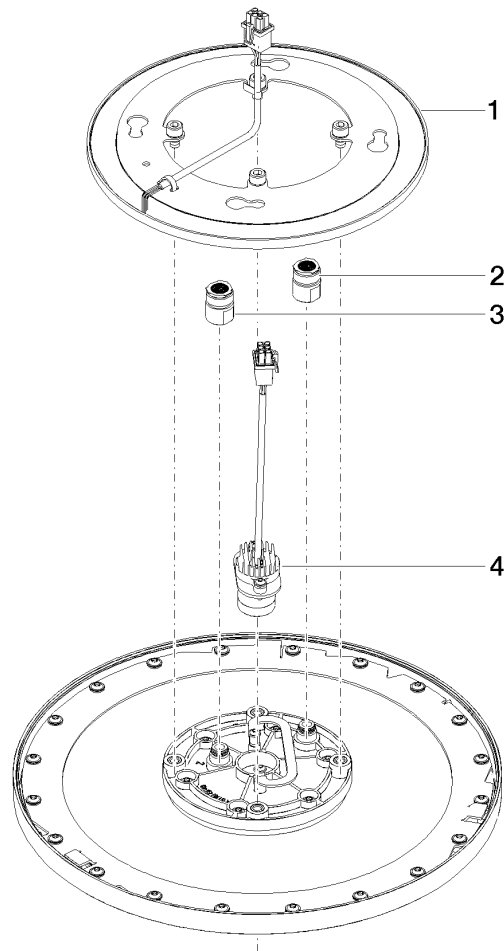

## Spare parts list

| No. | Item Number        | Name                   | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1   | 90 10 01 221 00 90 | electronic accessories | 1.00          | 2             |
| 3   | 90 24 03 309 00 90 | connection             | 1.00          | 2             |
| 2   | 90 24 03 309 01 90 | connection             | 1.00          | 2             |
| 4   | 90 10 01 225 00 90 | electronic accessories | 1.00          | 2             |