

# Rain shower for recessed ceiling installation with light 300 mm - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

28 034 970 Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

## Technical data:

- min. recess depth 137 mm

## Ceiling module power supply

- 12V DC (CV)

## electrical:

## Ambient lighting

## Spot lighting

- LED coloured light RGBW
- LED coloured light RGBW

## Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway
- Bulbs protected against splashing water

## Environment

## Planning tips:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

	Brushed Champagne (22kt Gold)	28 034 970-46
	Chrome	28 034 970-00
	Brushed Platinum	28 034 970-06
	Platinum	28 034 970-08
	Dark Chrome	28 034 970-19
	Light Gold	28 034 970-26
	Brushed Light Gold	28 034 970-27
	Brushed Durabronze (23kt Gold)	28 034 970-28
	Matte Black	28 034 970-33
	Brushed Dark Brass	28 034 970-39
	Brushed Bronze	28 034 970-42
	Champagne (22kt Gold)	28 034 970-47
	Brushed Chrome	28 034 970-93
	Brushed Dark Platinum	28 034 970-99

## Required miscellaneous




### Concealed ceiling installation box for recessed ceiling installation with light - 35 034 970 90

- concealed rough parts
- flush-mounted reflection box Ø 360 mm RAL 9003 signal white
- recess depth 137mm
- 2x female thread " outlet
- Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class 2
- ZigBee Light Link RGBW controller


## Rain shower for recessed ceiling installation with light 300 mm - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

28 034 970 Product version from 5/1/2022  
mm [inches]

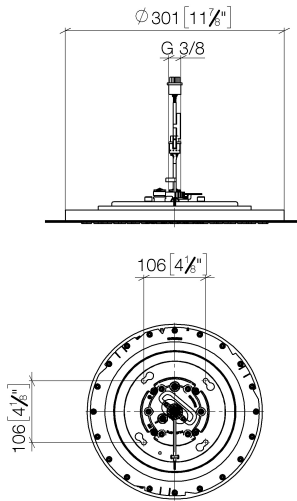

### Flow rate chart

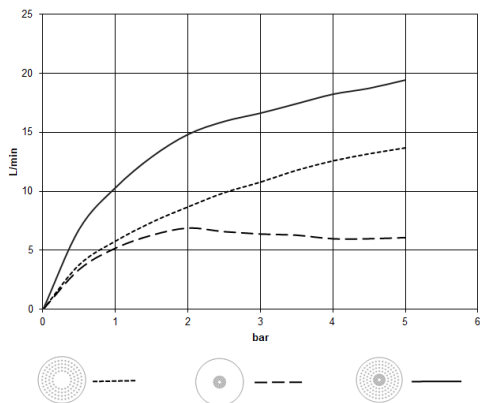

### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

### Ü-Zeichen



## Rain shower for recessed ceiling installation with light 300 mm - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

---

28 034 970 Product version from 5/1/2022

Certificates and sustainability

---


LGA\_38

WRAS\_240502

## Rain shower for recessed ceiling installation with light 300 mm - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

28 034 970 Product version from 5/1/2022

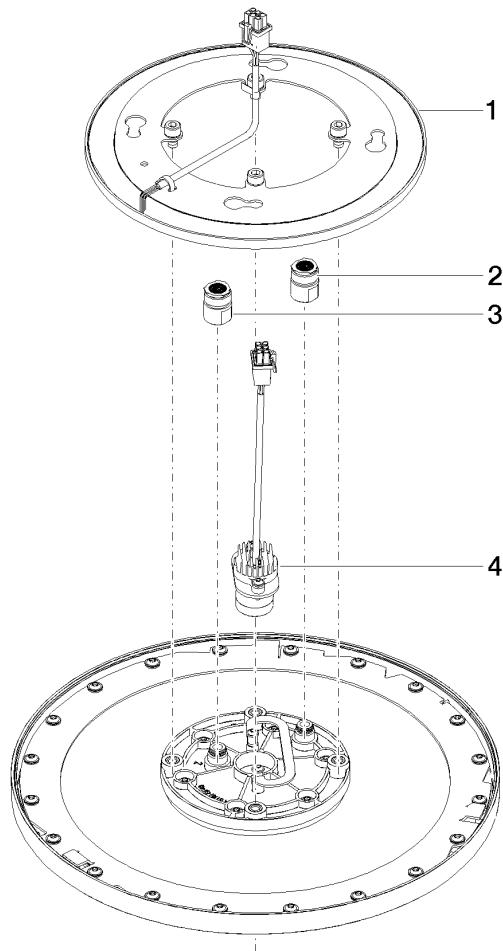

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	90 24 03 309 01 90	connection	1.00	2
3	90 24 03 309 00 90	connection	1.00	2
4	90 10 01 225 00 90	electronic accessories	1.00	2
1	90 10 01 221 00 90	electronic accessories	1.00	2