

## Rain shower for recessed ceiling installation 300 x 240 mm - Dark Chrome

SERIES SPECIFIC

28 043 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

### Technical data:

- min. recess depth 137 mm

### Planning tips:

- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Not suitable for use in a steam room.
- WRAS

	Dark Chrome	28 043 980-19
	Chrome	28 043 980-00
	Brushed Platinum	28 043 980-06
	Platinum	28 043 980-08
	Brushed Light Gold	28 043 980-27
	Brushed Durabronze (23kt Gold)	28 043 980-28
	Matte Black	28 043 980-33
	Brushed Champagne (22kt Gold)	28 043 980-46
	Champagne (22kt Gold)	28 043 980-47
	Brushed Chrome	28 043 980-93
	Brushed Dark Platinum	28 043 980-99

## Required miscellaneous




### Concealed ceiling installation box for recessed ceiling installation - 35 043 970 90


- concealed rough parts
- recess depth 137mm
- 2x female thread " outlet
- flush-mounted RAL 9003 signal white light reflection box 310 x 250 mm

28 043 980 Product version from 5/1/2022

mm [inches]

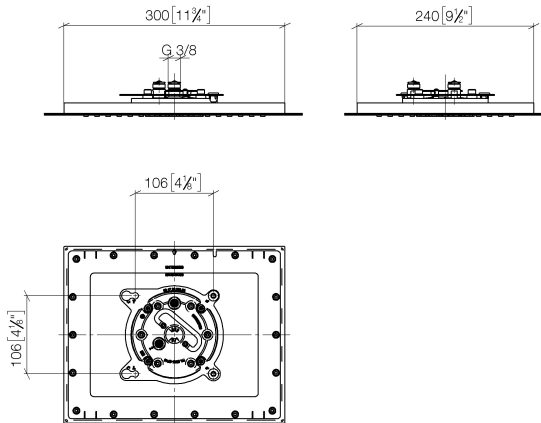

### Flow rate chart

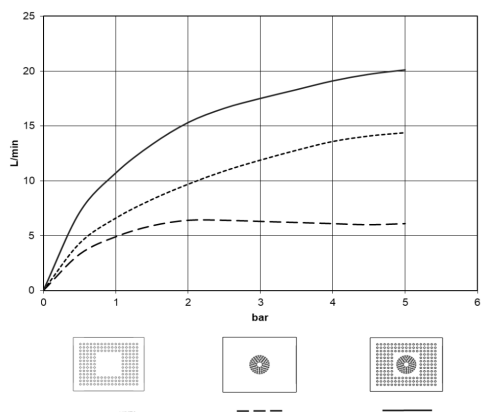

### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Rain shower for recessed ceiling installation 300 x 240 mm - Dark Chrome


SERIES SPECIFIC

28 043 980 Product version from 5/1/2022

### Certificates and sustainability

LGA\_38

WRAS\_240502

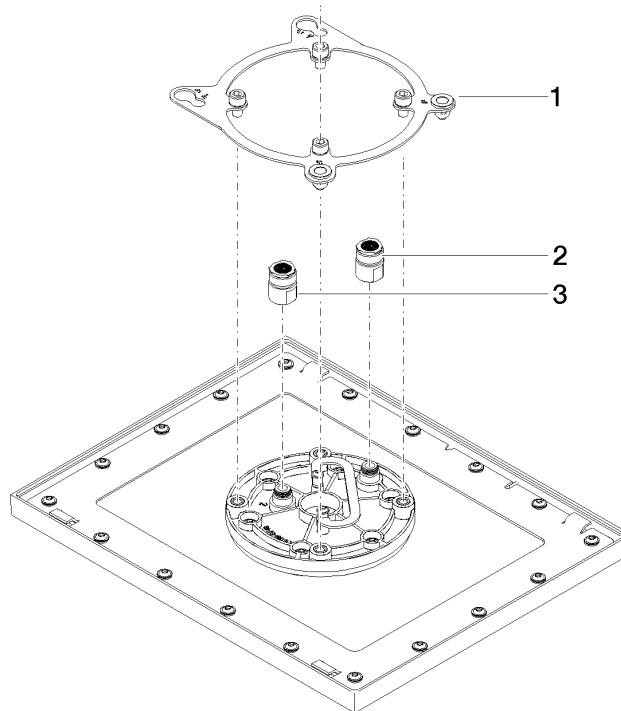

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
3	90 24 03 309 00 90	connection	1.00	2
1	90 17 20 260 00 90	flange	1.00	2
2	90 24 03 309 01 90	connection	1.00	2