

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Durabrand (23kt Gold) SERIES SPECIFIC

28 044 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

Technical data:

- min. recess depth 137 mm

Ceiling module power supply

- 12V DC (CV)

Electric:

Spot lighting

- LED coloured light RGBW

Ambient lighting

- Bulbs protected against splashing water

Activation

- Provided by customer: Zigbee gateway
- ZigBee Light Link RGBW controller

Environment

Planning tips:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

includes light bulbs with a Class G energy efficiency

includes light bulbs with a Class G energy efficiency

| | | |
|---|-------------------------------|---------------|
|  | Brushed Durabrand (23kt Gold) | 28 044 980-28 |
|  | Chrome | 28 044 980-00 |
|  | Brushed Platinum | 28 044 980-06 |
|  | Platinum | 28 044 980-08 |
|  | Dark Chrome | 28 044 980-19 |
|  | Brushed Light Gold | 28 044 980-27 |
|  | Matte Black | 28 044 980-33 |
|  | Brushed Dark Brass | 28 044 980-39 |
|  | Brushed Champagne (22kt Gold) | 28 044 980-46 |
|  | Champagne (22kt Gold) | 28 044 980-47 |
|  | Brushed Chrome | 28 044 980-93 |
|  | Brushed Dark Platinum | 28 044 980-99 |

Required miscellaneous




Concealed ceiling installation box for recessed ceiling installation with light - 35 044 970 90

- flush-mounted installation box 360x300 mm RAL 9003 signal white
- recess depth 137mm
- Input 100-240V AC 50-60Hz
- concealed rough parts
- Output 12V DC SELV / Class 2
- ZigBee Light Link RGBW controller


Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Durabronz (23kt Gold) SERIES SPECIFIC

28 044 980 Product version from 5/1/2022

mm [inches]

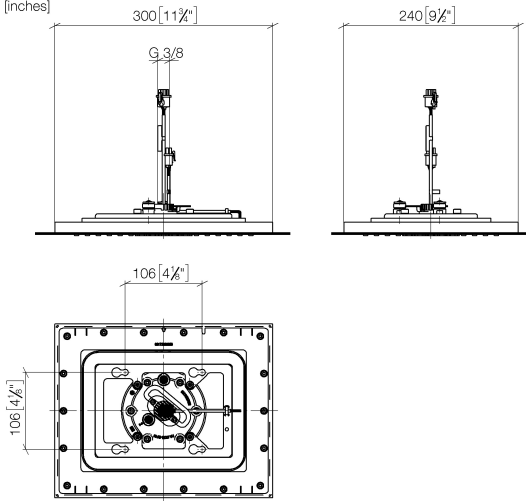

Flow rate chart

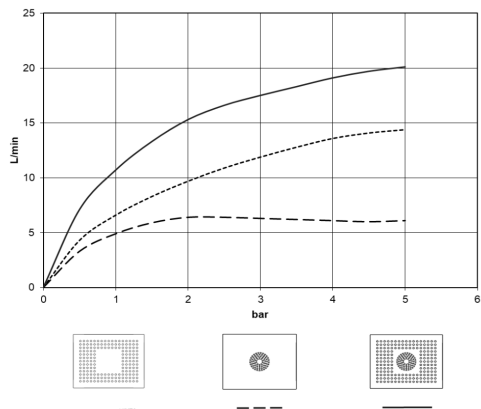

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Durabronz (23kt Gold) SERIES SPECIFIC

28 044 980 Product version from 5/1/2022


Certificates and sustainability

LGA_38

WRAS_240502

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Durabronz (23kt Gold)

28 044 980 Product version from 5/1/2022

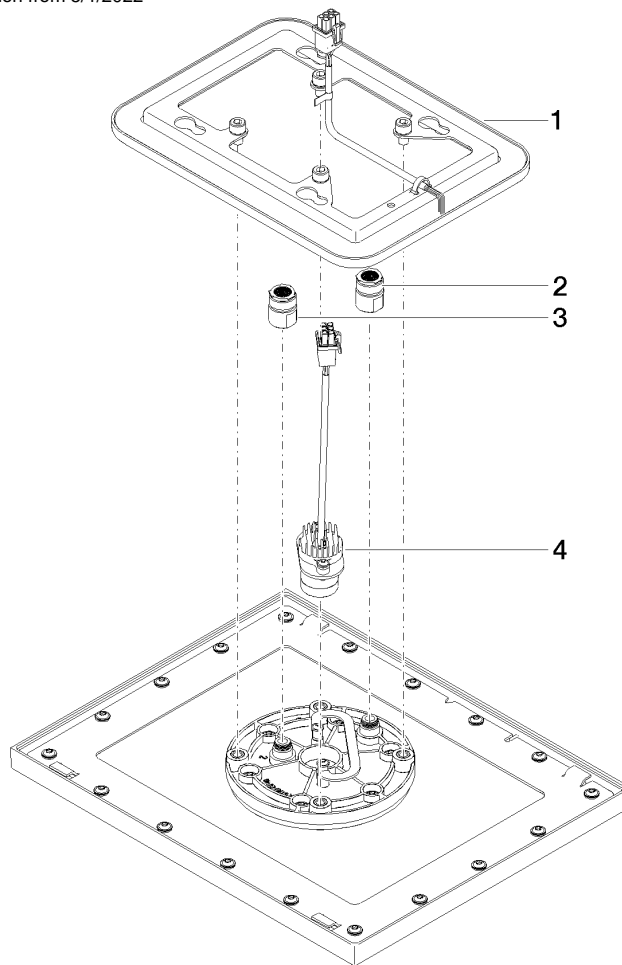

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 2 | 90 24 03 309 01 90 | connection | 1.00 | 2 |
| 1 | 90 10 01 224 00 90 | electronic accessories | 1.00 | 2 |
| 3 | 90 24 03 309 00 90 | connection | 1.00 | 2 |
| 4 | 90 10 01 225 00 90 | electronic accessories | 1.00 | 2 |